
т	۵	н <b>п</b>	m	D	C C





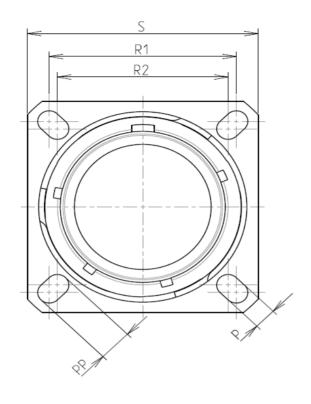

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 09

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium		
-Shell Plating	: Black Zinc Nickel		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	-65°C to +175°C		
-Salt Spray	: 500 hours		

: 9.15 g ± 10%

8D 0

G

09

Ζ


98

Ρ

F

А

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	5.49±0.2	
R1	18.26	
R2	15.09	
S	23.8±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M12x1-6g	

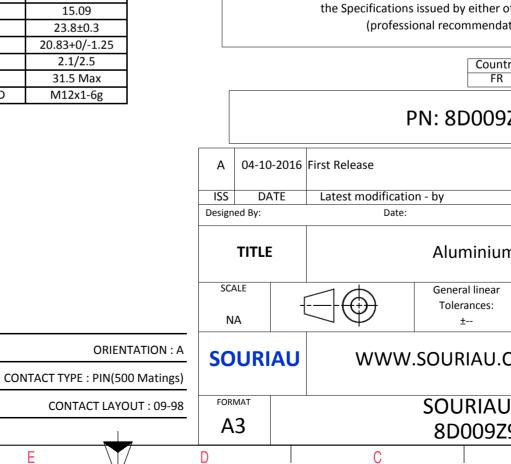

0		Φ		Þ		_	
LAYOUT SHOWN AS EXAMPLE							
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)							
FR     Not Listed       PN: 8D009Z98PA							
rst Release Latest modification - by MOD N°							
Date:     CUSTOMER DRAWING       Aluminium Receptacle 8D series							
$] \bigoplus$	General linear Tolerances: ±		٤	/ PROJECT 359	portu of	1	
WWW.SOURIAU.COM       This document is the property of SOURIAU         it must not be reproduced or communicated without permission							
	DRG N° 8PA-C			SHEET			
С		B		A		J	

		۵	<del>ار</del> (	m		0	
		Contact Layout					Panel Cutou
4	-X				ħ	SQUARE FLANGE RECEPTACLE (TYPE OR REAR MOUNTING	
	Conta positio ID A B C C Shell Arrangement Numb size no. conta 9 -98 3	X_axis         Y_axis (mm)         (mm)           + 065 (1.65)         + 0.38 (0.97)           + 000 (0.00)         - 0.75 (1.91)           - 0.65 (1.65)         + 0.38 (0.97)			₩ ₩		ØT
ω						Ø Ø R	im 6A AA 81 6T
	_						
						SOURIAU shall not be due to a use of the the Specifications issue (professional n	e Products wh ed by either of
N						PN:	FR 8D0092
_					ISS DATE		y
					Designed By:	Date:	luminium
<b>_</b>					SCALE NA		eneral linear Tolerances: ±
					SOURIA	U WWW.SO	URIAU.C
					FORMAT A3		DURIAU 3D009Z9
	Н	G	F	E	D	C	

