
	т о т m				
4			4		
ω		LAYOUT SHOWN AS EXAMPLE	3		
	Keying Shown as example				
	-Standard : Based on MIL-DTL-38999 Series III Connector dimension				
	-Shell Material: AluminiumØS32.5 Max-Shell Plating: NickelZ31 Max-Insulator: ThermoplasticVV THREADM22x1-6g-Contacts: Copper Alloy	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
N	-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum	CountryJurisdiction & Control ListFRNot Listed	2		
	-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories	PN: 8D515F05AD			
	-Temperature Range : -65°C to +200°C	A 19-10-2016 First Release	_		
	-Salt Spray : 48 hours		,		
	-Mass : 26.04 g ± 10%	ISS DATE Latest modification - by MOD N° Designed By: Date: CUSTOMER DRAWING	+		
		TITLE Aluminium Plug 8D series			
<u> </u>	BASIC SERIES: 8D 5 - 15 F 05 A D SHELL TYPE : Plug with RFI Shielding Image: Comparison of the second secon	SCALE General linear NPRDS / PROJECT NA Image: triangle display="block">± 859	1		
	CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 15 CONTACT TYPE : PIN(500 Matings)	- SOURIAU WWW.SOURIAU.COW it must not be reproduced or			
	PLATING : F = Nickel CONTACT LAYOUT : 15-02		_		
		A3 8D515F05AD-C 1/2			

	T	۵	г	m	D	0
4		Contact Layout $ \begin{array}{c} & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\$				
		X-axis (mm) Y-axis (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61)				
ω						
						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommenda
N					A 19-10-202	Coun FR PN: 8D515
					ISS DATE Designed By: TITLE	Latest modification - by Date: Alumi
<u> </u>					SCALE NA SOURIAU	General linear Tolerances: ±
					FORMAT A3	SOURIAU SOURIAU 8D515F
	Н	G	F	E	D	C

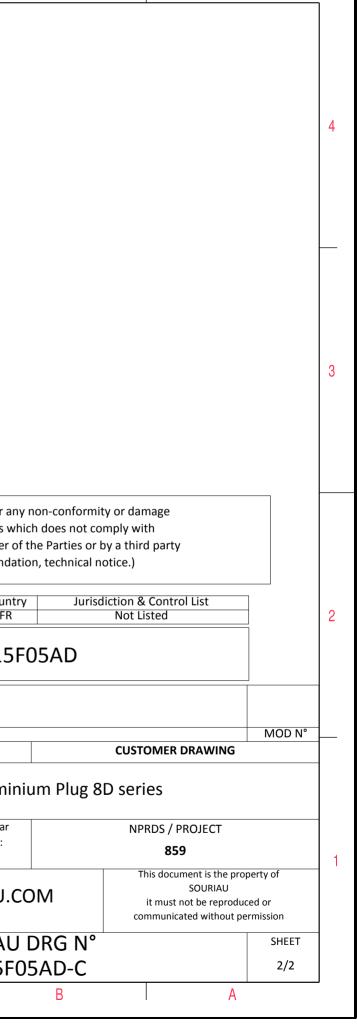

 \triangleright

σ