
	т п		0	σ		
A Z ØS-						4
			LAYOUT SHO	DWN AS EXAMPLE		3
	Keying Shown as example					
CHARACTERISTICS	Connector dimension	1				
-Standard : Based on MIL-DTL-38999 Series III	Dim Nominal ØS 35.7 Max	1				
-Shell Material : Composite -Shell Plating : Without Plating -Insulator : Thermoplastic -Contacts : Copper Alloy	Z 31 Max VV THREAD M25x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Seals & Grommet : Silicon Elastomer					ction & Control List	2
 Contact Plating : Gold over copper Alloy 0.8μm minimum Durability : 500 Mating cycles Delivered with Souriau contacts and Accessories 			FR Not Listed PN: 8D517X22SN			
-Temperature Range \pm -65°C to +175°C						
-Salt Spray : 2000 hours		A 18-10-2	A 18-10-2016 First Release			
_		ISS DAT Designed By:	E Latest modification - by Date:		CUSTOMER DRAWING	°
		TITLE		Composite Plug 8D		
		6015				
→ BASIC SERIES: 8D 5 - 17 X 22 → SHELL TYPE : Plug with RFI Shielding	S N	SCALE NA	-{	ral linear rances: ±	NPRDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact	ORIEN		WWW.SOUF	RIAU.COM	This document is the property of SOURIAU it must not be reproduced or	
SHELL SIZE : 17	CONTACT TYPE : SOCKET(5				communicated without permission	
PLATING : X = Without Plating	CONTACT LAY			RIAU DRG N°	SHEET	
		A3		517X22SN-C	1/2	
H G I	F E L	/ D	С	В	A	

	т	۵	н п	m		O	
4		Contact Layout					
	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0					
		· ,				SOURIAU shall not be liable fo due to a use of the Produc the Specifications issued by eith	cts w her c
0						(professional recomme	ount FR
_					A 18-10-20 ISS DATE Designed By: TITLE	116 First Release Latest modification - by Date: Cor	
_ _					SCALE NA SOURIA	General lin Tolerance ±	near es:
	Н	G	F	E	FORMAT A3 D	SOURI 8D51 C	

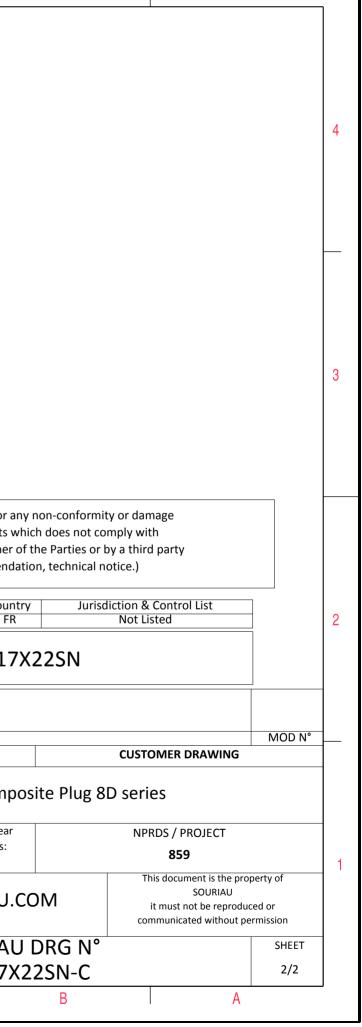

 \triangleright

σ