


NOTICE: ALL PARTS MUST MEET TO RoHS REQUIREMENTS

REV.	DESCRIPTION	DRAWN	APPROVED	DATE
X1	NEW DRAWING	A.H	A.C	2021.07.02

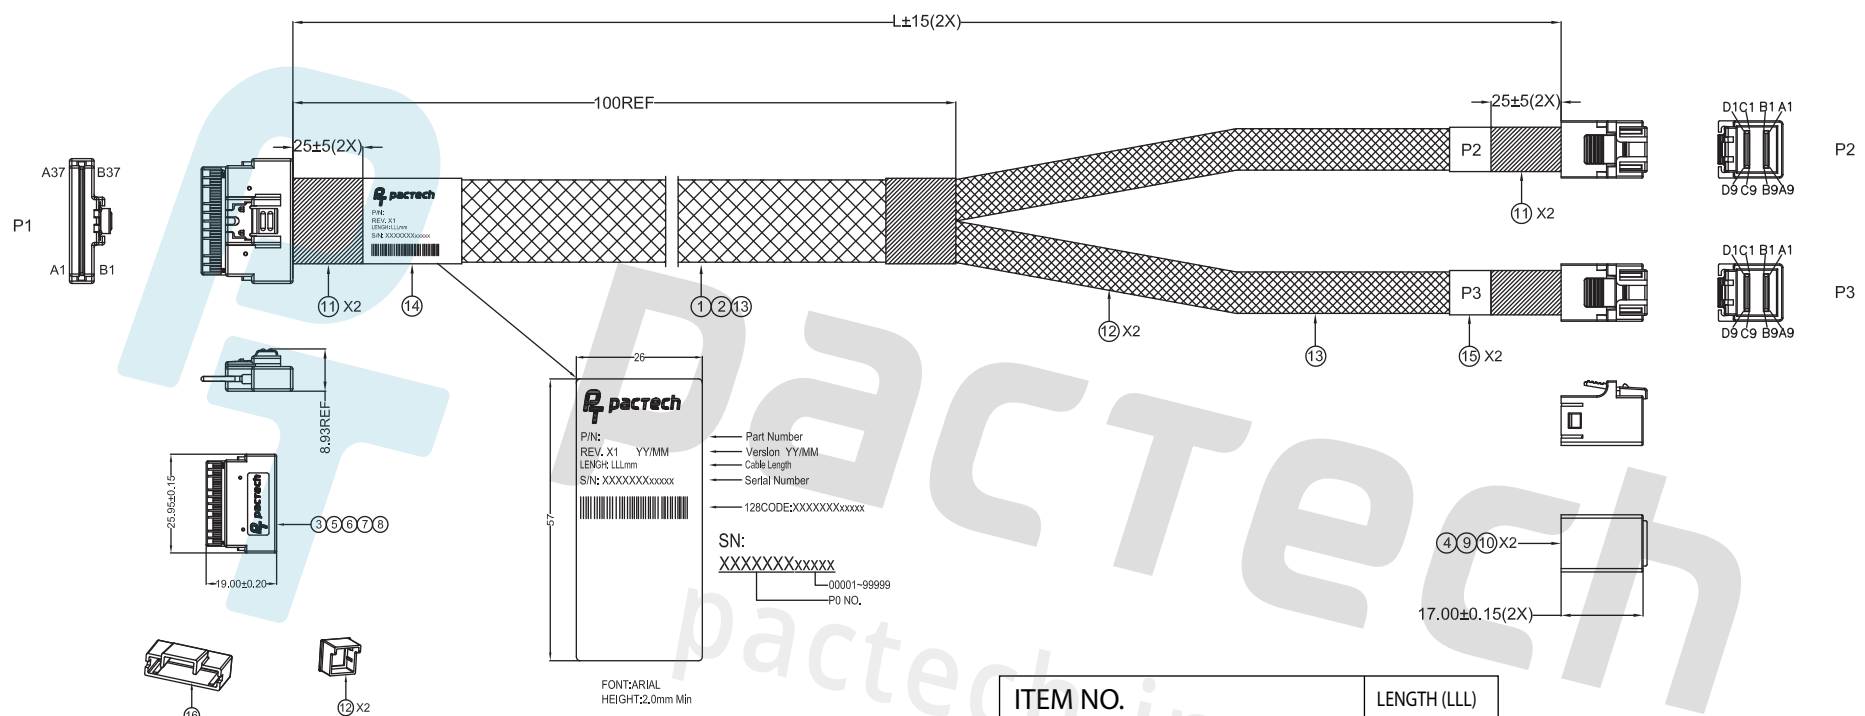

**pacotech**

P/N: REV. X1 YY/MM  
 LENGTH: LLLmm  
 S/N: XXXXXXXXxxxxx

Part Number  
 Version YY/MM  
 Cable Length  
 Serial Number  
 128CODE:XXXXXXXXxxxx

SN:  
 XXXXXXXXxxxxx  
 00001-99999  
 P/N NO.



FONT:ARIAL  
 HEIGHT:2.0mm Min

ITEM NO.	LENGTH (LLL)
AMPH-SAS-SL8-43X2-050	50mm ± 15
AMPH-SAS-SL8-43X2-100	100mm ± 15

ITEM	NAME	QTY	DESCRIPTION	NOTE
16	DUST CAP	1	DUST CAP FOR SFF-8654 8i, PE, NATURAL	
15	LABEL	2	WHITE LABEL, 50*10MM(REF)	
14	LABEL	1	WHITE LABEL, 57*26MM(REF)	
13	WEAVE	A/R	PLASTIC BRAID SLEEVE, PET, GREEN,OD:10.0MM	
12	DUST CAP	2	DUST CAP FOR SFF-8643 4i, PE, NATURAL	
11	ACETATE TAPE	A/R	ACETATE TAPE, W=25MM, BLACK	
10	HOUSING	2	HOUSING FOR SFF-8643 4i STR, BLACK	
9	INNER MOLD	2	INNER MOLDING FOR SFF-8643 4i STR, BLACK	
8	RIVET	2	RIVET FOR SFF-8654	
7	LATCH	1	LATCH FOR SFF-8654	
6	HOUSING	1	HOUSING FOR SFF-8654 8i STR, BLACK	
5	INNER MOLD	1	INNER MOLDING FOR SFF-8654 8i STR, BLACK	
4	8643 4i PCB	4	PCB FOR INT. MINI SAS HD 4i STR, AU30u",100 ohm	
3	8654 8i PCB	1	PCB FOR SLIMLINE SAS 8i STR, AU30u",100 ohm	
2	WIRE	A/R	UL1571, 32AWG	
1	SAS CABLE	A/R	SAS CABLE: UL20744 30AWG	

For Customer Made Items Order:  
 -Minimum \$200 value  
 -NCR(Non-cancelable&non-returnable)  
 -One time tooling charge,if any,must be approved with authorized signature&date.  
 -Turn around time counted ARO(After Received FA or drawing approval)



APPROVED BY \_\_\_\_\_  
 COMPANY: \_\_\_\_\_  
 PURCHASING/ENGINEER: \_\_\_\_\_  
 DATE: \_\_\_\_\_

1. * ±0.1 2. ** ±0.1 3. *** ±0.05 4. FRACT.±1/32" 5. ANGULAR ±1/2'	Customer P/N: N/A	 www.pactech-inc.com TITLE SLIMSAS 8654 8i to 2x HD MiniSAS 4i DRAWING NO. AMPH-SAS-SL8-43X2-LLL
	Customer REV.: N/A	
	PART NO. SEE TABLE	
	APPROVED A.C	
	CHECKED J.C	
DATE 2021-07-02	DRAWN A.H	 UNIT SCALE SHEET REV. MM NONE 1/2 X1

NOTICE: ALL PARTS MUST MEET TO RoHS REQUIREMENTS


REV.	DESCRIPTION	DRAWN	APPROVED	DATE
X1	NEW DRAWING	A.H	A.C	2021.07.02

### WIRING TABLE

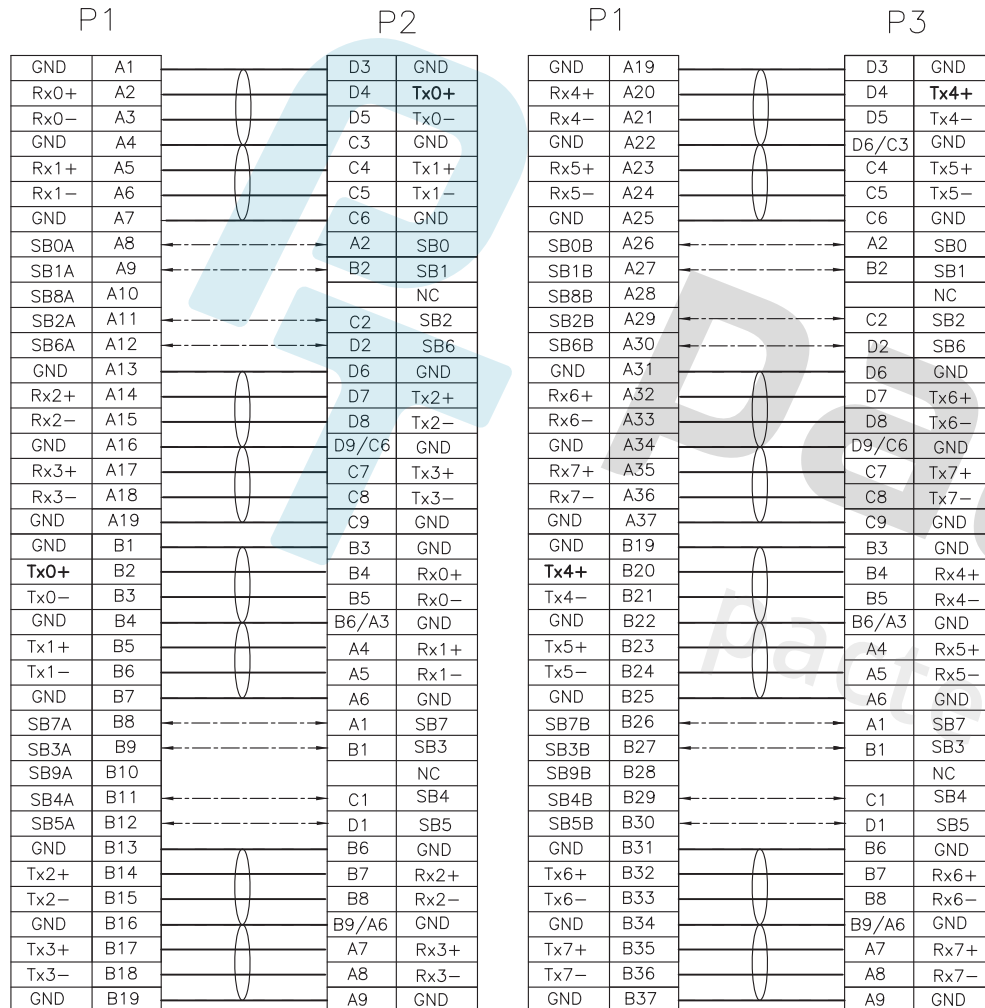

FONT:ARIAL  
HEIGHT:2.0mm Min

- TEST CONDITIONS:
- 100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST.
  - CONDUCTIVE RESISTANCE: 3Ω MAX.
  - INSULATION RESISTANCE: 10 MΩ
  - HI-POT TEST: 300VDC FOR 10ms.
  - THIS PRODUCT MEETS PCIe4.0 .



1. * ±0.1 2. ** ±0.1 3. *** ±0.05 4. FRACT.±1/32" 5. ANGULAR ±1/2"	Customer P/N: N/A		
	Customer REV.: N/A		
	PART NO. SEE TABLE		TITLE SLIMSAS 8654 8i to 2x HD MiniSAS 4i
	APPROVED A.C		DRAWING NO. AMPH-SAS-SL8-43X2-LLL
	CHECKED J.C		UNIT SCALE SHEET REV. MM NONE 2/2 X1
DRAWN A.H	DATE 2021-07-02		