
**Mounting Option** 


08-#4-40 Unified Threaded Inserts

## **Contact Detail**

500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

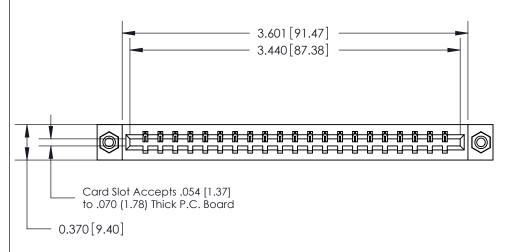

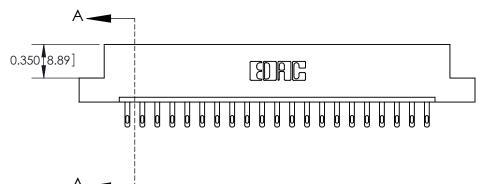

THIS IS A C.A.D. GENERATED DRAWING



ISSUE NUMBER

ORIGINAL

0.388 [9.86] Card Slot
.160 [4.06] Point of Contact
SECTION A-A

## **See Accompanying Page for:**

- Bend Detail
- Mounting Options
- Features and Specifications

333 Series Card Edge Connector Part Number: 333-021-500-108



EDAC INC TORONTO, ONTARIC CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.
WITHOUT WRITTEN PERMISSION.

	ACAD REFERENCE NO	. 333 ENG MASTER
	DRAWN: J.LEE	DATE: OCT. 14/09
	CHECKED:	DATE:
	SCALE: NTS	SHEET 1 OF 4
0	DRAWING NUMBER	ISSUE

ING NUMBER ISSUE 333 Assembly 1

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1



Contact Bend Detail		ACAD REFERENCE NO. 333 ENG MASTER			
		DRAWN: J.LEE	DATE: OCT. 14/09		
		CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS	SCALE: NTS	SHEET :	2 OF 4	
	TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE RASIS FOR THE	DRAWING NUMBER		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	333 Assembly		1	

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER



1220F NOWRE

DRIGINAL

1



333 Series Card Edge Connector		ACAD REFERENCE NO. 333 ENG MASTER				
	Mounting Options		DRAWN:	J.LEE	DATE: O	CT. 14/09
			CHECKED	):	DATE:	
	EDAC INC THESE DRAWINGS AND SPECIF		SCALE:	NTS	SHEET :	3 OF 4
		TORONTO, ONTARIO  ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED  OR LISED AS THE BASIS FOR THE	DRAWING	NUMBER		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	3	33 Assembly		1

ISSUE NUMBER

ORIGINAL



## **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ACAD REFERENCE NO. 333 ENG MASTER
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09
redictes and specifications	CHECKED: DATE:
	AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4
IORONIO, ONIARIO SHALL NOT BE REI	PRODUCED, OR COPIED DRAWING NUMBER ISSUE
	SALE OF APPARATUS 333 Accembly 1