Ŧ	۵	н п	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Without Plating			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65℃ to +175℃			

: 2000 hours

: 14.4 g ± 10%

8D 0

G

13

Х

26

А

F

С


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-26



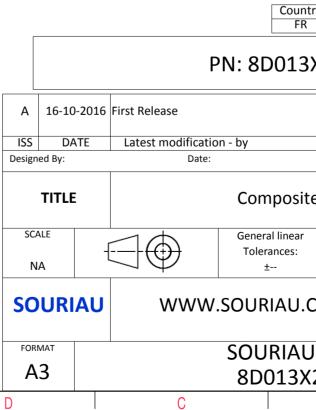

σ	A			
			4	
AS EXAMPLE			3	
any non-conformit which does not co or of the Parties or I ndation, technical n untry Jurisc FR 3X26AC	mply with by a third party		2	
		MOD N°		
site Receptacl	CUSTOMER DRAWING Receptacle 8D series			
ar	NPRDS / PROJECT 859			
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
UDRG N° SHEET				
X26AC-C	A	1/2		
5				

_	T	G	н г	m	D	0
		Contact Layout				Panel Cutou
4	(26			۲ – ۲	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		6#22D			¥	
ω	Ctc A B C D E F 1 2	13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 4.34 3.25 0 -3.25 0				Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
\sim						Countr FR
					A 16-10-202	PN: 8D013>
_					ISS DATE	Latest modification - by Date:
					Designed By:	Composite
					SCALE NA	General linear Tolerances:
					SOURIAL	J WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013X2
L	Н	G	F	E	D	С

