


0

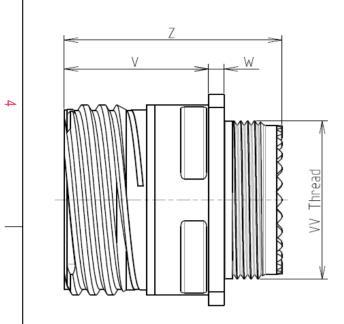

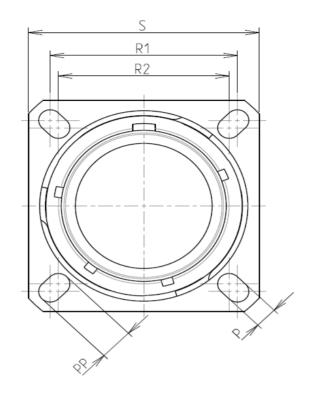



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

8D 0

G

17

W

22

S

F

E


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g


ORIENTATION : E

CONTACT LAYOUT : 17-22

CONTACT TYPE : SOCKET(500 Matings)

Е



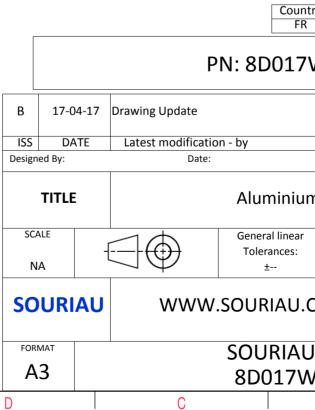

	σ		A			
a					4	
0		1				
S EXA	AMPLE				3	
	non-conformit					
er of t	ch does not co he Parties or b	by a third part	ТУ			
iudtlO	on, technical n					
untry FR	Jurisd	liction & Cont Not Listed	rol List		2	
7\\\	/22SE					
		CUSTOME	R DRAWING	MOD N°	<u> </u>	
um	n Receptacle 8D series					
					-	
ar :			PROJECT <b>59</b>		4	
		This doc	ument is the prop SOURIAU	perty of	1	
J.CC	ואנ		t not be reproduc			
	J DRG N° SHEET					
W2	22SE-C	I		1/2	J	
	В		A			

	<b>工</b>	G	וד	m		0	
4		Contact Layout				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	Panel Cuto
	Ctc	2#12 2#8 Triax 17-22 X Y				Max. thickness panel for receptacle: T	
ယ	A B C D	0 4.57   6.32 0   0 -4.57   -6.32 0				Dim ØA ØA/ R1 ØT	A A
	<b> </b>					SOURIAU shall not be due to a use of the the Specifications issued (professional re	Products v d by either
2						PN: 8	Coun FR 3D017
						04-17 Drawing Update DATE Latest modification - by	
					SCALE	E Al	uminiu neral linear olerances:
<b>_</b>					NA SOUR	IAU WWW.SOL	JRIAU.
					FORMAT A3		URIAU D017V
l	Н	G	F	E	D	С	

