© TE Connectivity All Rights Reserved.
VERTRAULICHE UNVERÖFFENTLICHTE ZEICHNUNG
FREI FUER VEROEFFENTLICHUNG
ALLE RECHTE VORBEHALTEN

MATED WITH:
PASSEND ZU:
HA 16

REVISIONS AENDERUNGEN					
P	LTR	DESCRIPTION BESCHREIBUNG	DATE	DWN	APVD
	D7	REVISED PER ECR-21-123577	08JUL2022	RK	JB

SCREW TERMINATION

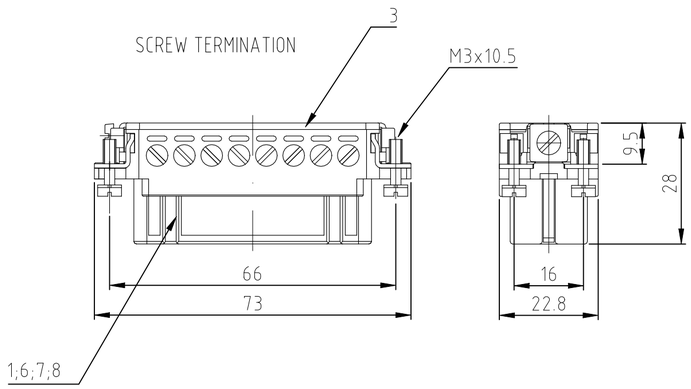

CRIMP TERMINATION

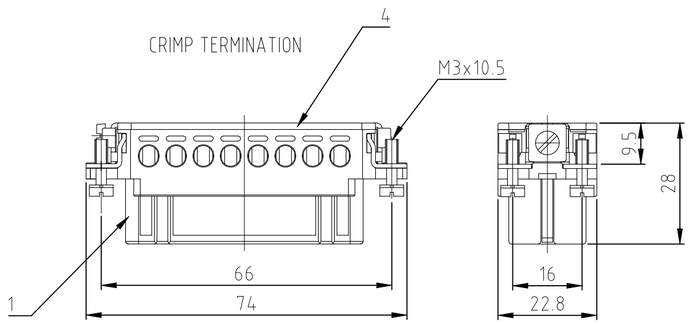

SPRING CLAMP TERMINATION

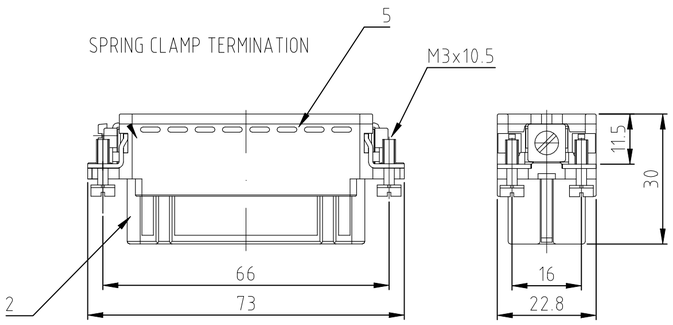

Contact arrangement / view from termination side



Contact arrangement / view from termination side



Contact arrangement / view from termination side



Contact arrangement / view from termination side



NOTES:

1 SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM

2 SUITABLE HOOD SIZE 5; 7; 9; 11: SERIES HA; HD
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264

3 Strip lenght: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm

4 STANDARDS:
DIN EN 61984; DIN EN 60664-1

5 PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED

6 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 300 PIECES

7 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 150 PIECES

8 SPECIAL PACKAGING: AIS
PACKAGING UNIT: 250 PIECES

9 SPECIAL PACKAGING: WIELAND
PACKAGING UNIT: 100 PIECES

Panel cut-out for contact insert when used without housing

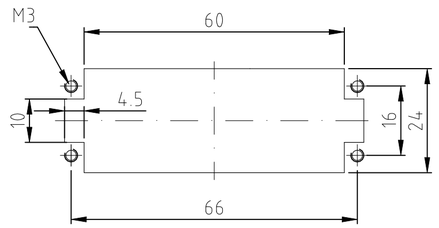

Assembling instruction



10 DISTANCE FOR SAFETY
CONTACT MARKING MAX. 24 mm

ORDERING TEXT / BESTELLTEXT	DESCRIPTION / BENENNUNG	MATERIAL	COLOR / FARBE	ITEM NO. POS.	REMARKS / BEMERKUNGEN
HA.16.Bu.S.B1-16.WIE	Socket insert screw	PBT	light beige	8	with stainless steel-fixing screw
HA.16.Bu.S.B1-16.AIS	Socket insert screw	PBT	light beige	7	with stainless steel-fixing screw
HA.16.Bu.S.B17-32.KM	Socket insert screw	PBT	light beige	6	with AU contact
HA.16.Bu.S.B1-16.KM	Cover	PBT	light beige	5	
OBSOLETE HA.16.Bu.S.-VA.B.1-16	Cover	PBT	light beige	4	
OBSOLETE HA.16.Bu.S.-VA.B.17-32	Cover	PBT	light beige	3	
OBSOLETE HA.16.Bu.S.-AU.B.1-16	Socket insert spring clamp	PBT	light beige	2	
OBSOLETE HA.16.Bu.C.B.49-64	Socket insert crimp screw	PBT	light beige	1	
HA.16.Bu.S.B.49-64					
OBSOLETE HA.16.Bu.SC.B.49-64					
OBSOLETE HA.16.Bu.SC.B.33-48					
HA.16.Bu.S.B.33-48					
OBSOLETE HA.16.Bu.C.B.33-48					
HA.16.Bu.S.B.17-32					
OBSOLETE HA.16.Bu.SC.B.17-32					
OBSOLETE HA.16.Bu.C.B.17-32					
OBSOLETE HA.16.Bu.SC.B.1-16					
HA.16.Bu.C.B.1-16					
HA.16.Bu.S.B.1-16					

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.

DIMENSIONS: MASSE\NHEITEN: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN
0 PLC ± – 1 PLC ± – 2 PLC ± – 3 PLC ± – 4 PLC ± –
ANGLES / WINKEL ± –

MATERIAL –

FINISH / OBERFLAECHE/FARBE –

DWN Schneider	09.02.2000	TE Connectivity
CHK Schweiger	09.02.2000	
APVD –		NAME Female insert HA.16.BU.C/S –
PRODUCT SPEC PRODUKTSPEZ. 108-74007		
APPLICATION SPEC. VERABEITUNGSSPEZ. 114-74009		
WEIGHT GEWICHT –		SIZE A2 · CAGE CODE 00779 · DRAWING NO ZEICHNUNGS-NR. C-1103417 · RESTRICTED TO NUR FUER –
CUSTOMER DRAWING / KUNDENZEICHNUNG		SCALE MASSSTAB 1:1 · SHEET BLATT 1 von 1 · REV D7

1103417