

## Electronic housing - DCS 15 M C O C C 7035 - 2203189

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Display housing, 15", light gray, central window, front level, consisting of two half shells with screws

### Your advantages

- ☑ Display housings for mobile and stationary operator panels
- ☑ Degree of protection: up to IP54
- ▼ Temperature range: -20°C to +50°C
- ▼ Flammability rating UL 94-V0



## **Key Commercial Data**

Packing unit	4 pc
GTIN	4 055626 378435
GTIN	4055626378435

### Technical data

### Item properties

Туре	DCS 15 M C O C C 7035
Order No.	2203189
Housing type	Display housing
Battery compartment	no
Wall fastening	no
Ventilation openings present	no

#### Measurements

Width [ w ]	362 mm
Height [ h ]	286 mm



# Electronic housing - DCS 15 M C O C C 7035 - 2203189

## Technical data

### Measurements

Depth [ d ]	62 mm	
Diagonal	15 in. (Window for display)	
Dimensions	306 mm x 230 mm (Window for display, center position)	
Material specifications		
Flammability rating according to UL 94	V0	
Housing material	ABS	
Packaging information		
Pieces per package	4	
Denomination packing units	Pcs.	
Standards and regulations		


V0


## Drawings

Flammability rating according to UL 94



# Electronic housing - DCS 15 M C O C C 7035 - 2203189



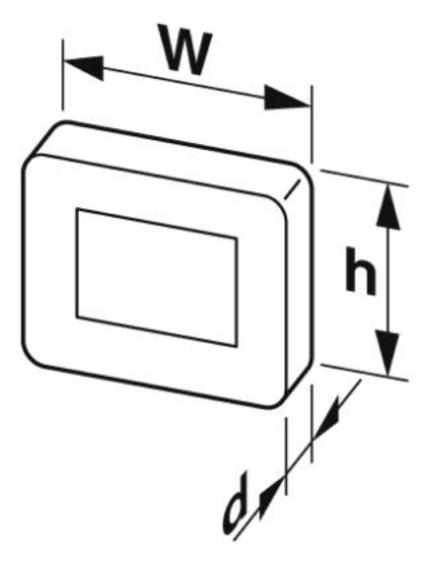

Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg

Germany

Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com