
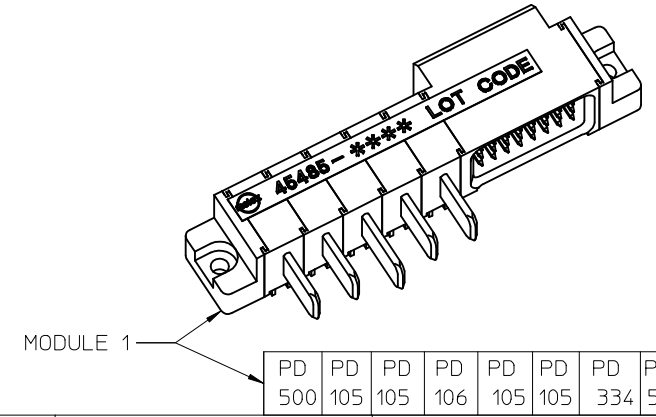

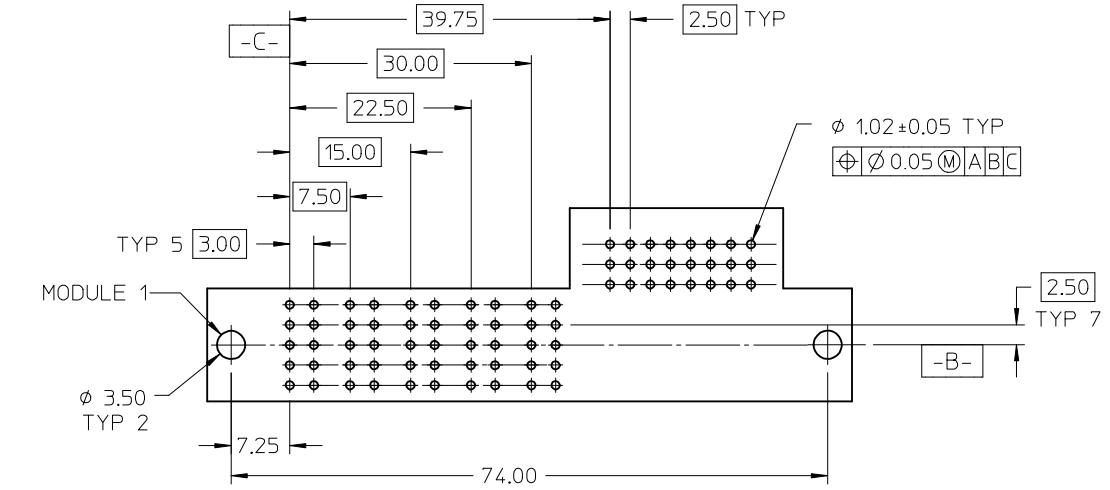
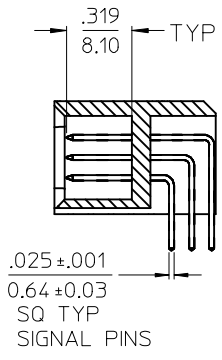
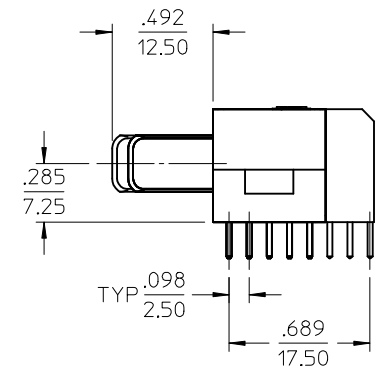


- NOTES:
- MATERIAL: LCP, GLASS FILLED, UL94V-0, BLACK.
CONTACTS: COPPER ALLOY
 - FINISH: SELECT GOLD: 30 MI MIN.
SELECT TIN: 100 MI MIN.
BOTH OVER NICKEL
 - PRODUCT SPECIFICATION: PS-45424-001.
 - PACKAGING SPECIFICATION: PK-45485-001.

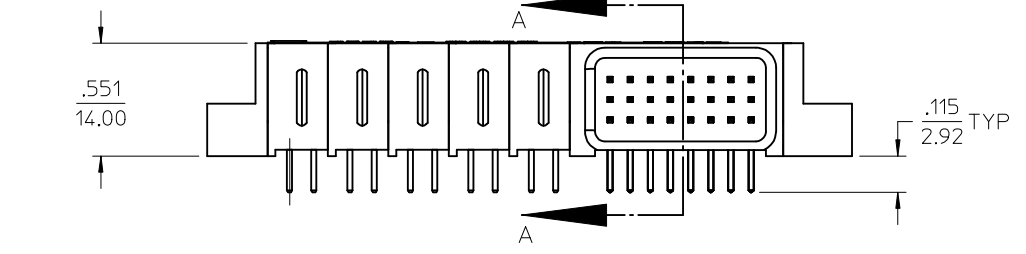

PCB LAYOUT: COMPONENT SIDE
PCB THICKNESS: .062/157
PCB TOLERANCE: ±.002/0.05

GEOM TOL PCB	EC NO: UCP2005-2625	QUALITY SYMBOLS
	DRWN: ADRA1N02005/07/07	
	CH'KD: KSAMIEC 2005/07/08	
	APPR: APATEL 2005/07/13	
T1	REV	DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
	4 PLACES ± ---	± ---
	3 PLACES ± ---	± .010
	2 PLACES ± 0.25	± .015
	1 PLACE ± 0.38	± ---
ANGULAR ± 1/2°		
DRAFT WHERE APPLICABLE		
MUST REMAIN WITHIN DIMENSIONS		

SCALE 1:1	DESIGN UNITS METRIC
DIMENSION STYLE IN/MM	
DRAWN BY SAMIEC	DATE 2003/06/10
CHECKED BY MARGULIS	DATE 2003/06/10
APPROVED BY MARGULIS	DATE 2003/06/10

THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
TITLE POWER DOCK ASSEMBLY POWER RIGHT ANGLE SOLDER TAIL		
molex MOLEX INCORPORATED		
MATERIAL NO. 45485-0011	DOCUMENT NO. SD-45485-011	SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

PD 500	PD 105	PD 105	PD 106	PD 105	PD 105	PD 334	PD 501
--------	--------	--------	--------	--------	--------	--------	--------