

# Housing - HC-STA-D50-HHFD-1STP29-EL-AL - 1424407


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sleeve housing D50, for double locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 1, lateral, height: 80 mm, cable gland: Pg29, support sleeve: no, 1x Pg29, Standard



## Key Commercial Data

Packing unit	1 pc
GTIN	 4 0 5 5 6 2 6 3 7 1 4 7 4
GTIN	4055626371474

## Technical data

### Dimensions

Height	80 mm
Width	56 mm
Length	82 mm

### Ambient conditions

Degree of protection (IP)	IP66
	IP67
Ambient temperature (operation)	-40 °C ... 125 °C

### General

Size	D50
Housing type	Sleeve housing
Color	gray aluminum
Locking type	for double locking latch
No. of cable outlets	1
Cable outlet	lateral
Screw connection	Pg29
Type of the screw connection	1x Pg29

# Housing - HC-STA-D50-HHFD-1STP29-EL-AL - 1424407

## Technical data

### General


Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated

### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

Dimensional drawing

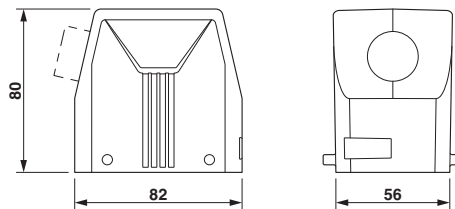

Dimensional drawing

## Classifications

### eCl@ss

eCl@ss 10.0.1	27440202
eCl@ss 11.0	27440202
eCl@ss 5.1	27261200
eCl@ss 6.0	27261200
eCl@ss 7.0	27440202
eCl@ss 9.0	27440202

### ETIM

ETIM 6.0	EC000437
ETIM 7.0	EC000437

## Approvals

### Approvals

### Approvals

UL Recognized / cUL Recognized / DNV GL / EAC / cULus Recognized

# Housing - HC-STA-D50-HHFD-1STP29-EL-AL - 1424407

## Approvals

Ex Approvals

---

### Approval details

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E255026
cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E255026
DNV GL		<a href="https://approvalfinder.dnvgl.com/">https://approvalfinder.dnvgl.com/</a>	TAE000037S
EAC			RU C- DE.BL08.B.00511
cULus Recognized			

## Accessories

### Accessories

Corrugated pipe screw connection

Screw connection - WP-G HF IP66 PG29 BK - 3240893



Cable gland, Pg thread, IP66 protection, straight

---

Screw connection - WP-G HF IP69K PG29 BK - 3240879



Cable gland, Pg thread, IP68/69k protection, straight

## Housing - HC-STA-D50-HHFD-1STP29-EL-AL - 1424407

### Accessories

---

Screw connection - WP-GA HF IP66 PG29 BK - 3240921



Cable gland, Pg thread, IP66 protection, angled

---

Screw connection - WP-GA HF IP69K PG29 BK - 3240907



Cable gland, Pg thread, IP68/69k protection, angled

---

Screw connection - WP-GR HF IP66 PG29 BK - 3240949



Cable gland, Pg thread, IP66 protection, with strain relief

---

Screw connection - WP-GR HF IP69K PG29 BK - 3240935



Cable gland, Pg thread, IP68/69k protection, with strain relief

---

Screw connection - WP-G PP HF PG29 - 3240993



Cable gland made from PP with Pg thread, IP65 protection

---

## Housing - HC-STA-D50-HHFD-1STP29-EL-AL - 1424407

### Accessories

Screw connection - WP-GT PP HF PG29 - 3241007



Cable gland made from PP with Pg thread, rotatable, IP54 protection

---

Screw connection - WP-G BRASS IP40 PG29 - 3241042



Cable gland made from brass with Pg thread, IP40 protection

---

Screw connection - WP-GT BRASS PG29 - 3241028



Cable gland made from brass with Pg thread, rotatable, IP40 protection

---

Screw connection - WP-G BRASS IP65 PG29 - 3241056



Cable gland made from brass with Pg thread, IP65 protection

---

### Full screw connection

Cable gland - G-INS-PG29-M68N-NNES-S - 1411176



Cable gland, cable gland material: Nickel-plated brass, external cable diameter 18 mm ... 25 mm, shielding: no, connecting thread: Pg29, color: silver, with O-ring

---

## Housing - HC-STA-D50-HHFD-1STP29-EL-AL - 1424407

### Accessories

Cable gland - G-INSEC-PG29-M68N-NNES-S - 1411201



Cable gland, cable gland material: Nickel-plated brass, external cable diameter 18 mm ... 25 mm, shielding: yes, connecting thread: Pg29, color: silver, with O-ring

---

Phoenix Contact 2021 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>