



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

850 MHz Ceramic Bandpass Filter

Part Number: AM850B1224



Electrical specifications

Center Frequency: 850 MHz
Bandwidth: 2 MHz
VSWR in BW: 2.0 : 1
Input / Output Impedance: 50 Ohms
Passband: 849-851 MHz
Passband Insertion Loss: 2.0 dB max
Passband Ripple: 0.1 dB max
Rejection: 10 dBc min at 831 MHz
Rejection 2: 1 W

Mechanical


Mounting Method: SMT
Dimensions: 19 x 17 x 7 mm

Environmental

Operating Temperature: -40°C to 85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

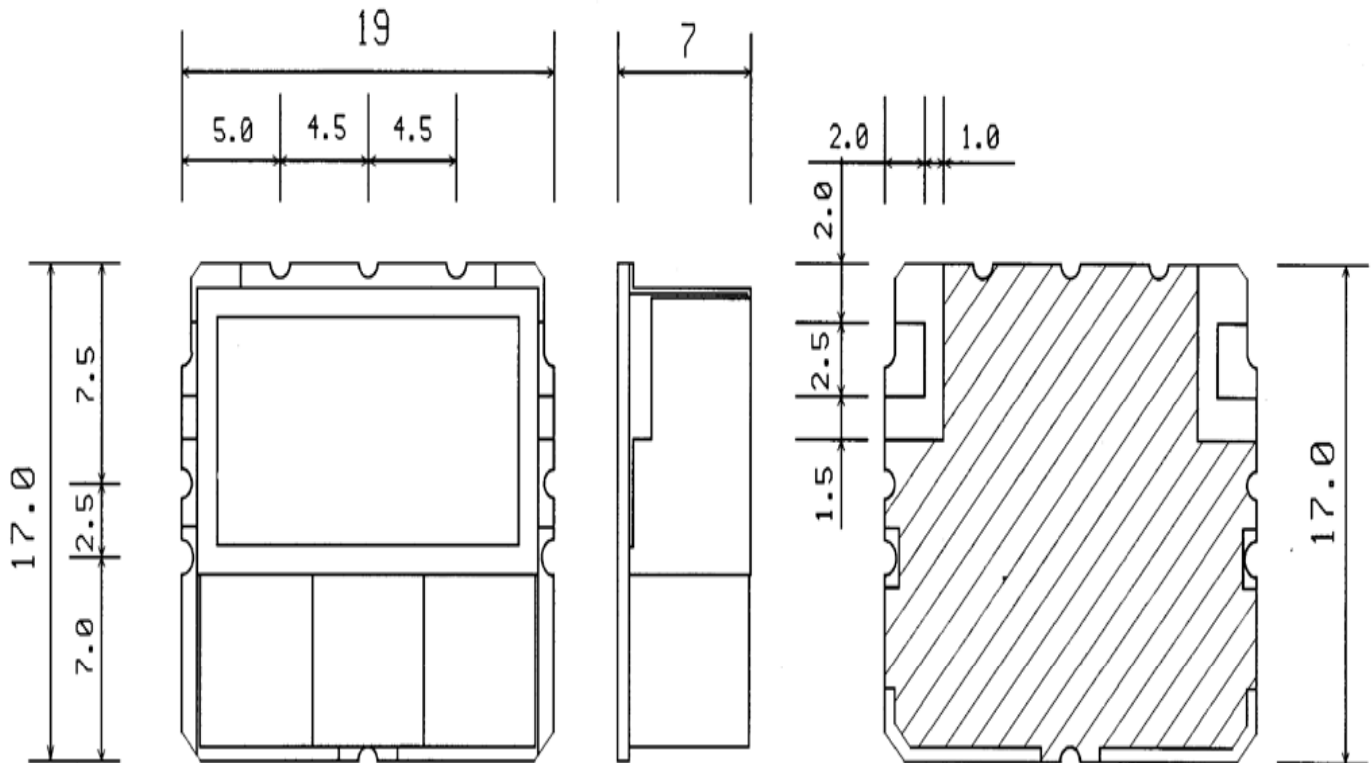

Unit:mm

Tolerance : +/- 0.3