


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES IN PART OR WHOLE WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REV.	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	02/July/09	
A1	REVISED CONDUCTOR RESISTANCE	20/Aug/09	
A2	Correction of the DWG NO	17/Dec/2019	

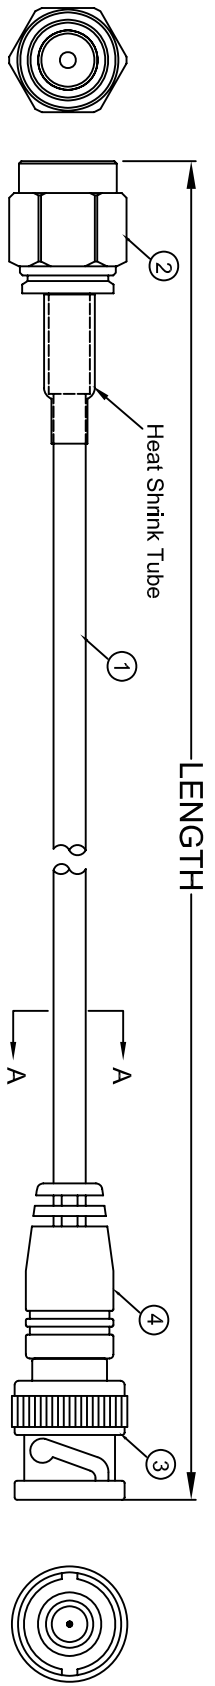


SMA MALE

BNC M

LENGTH & P/N Table

LENGTH	P/N
6 INCH(152±15mm)	CO-058SMABNCO-000.6
1FT(305±20mm)	CO-058SMABNCO-001
1.5FT(457±20mm)	CO-058SMABNCO-001.5
2.5FT(762±20mm)	CO-058SMABNCO-002.5
5FT(1524±30mm)	CO-058SMABNCO-005
7.5FT(2286±40mm)	CO-058SMABNCO-007.5
10FT(3048±40mm)	CO-058SMABNCO-010



SECTION A-A

- NOTES:**
1. CABLE: [20AWG(19/0.18±0.008mm)*1C+ALMYLAR +BRAID(16*8/0.12±0.008mm)]TINNIE COPPER INSULATION: PE OD= 2.95±0.10mm COLOR: TRANSPARENT JACKET: HALF MATTE PVC LOW TOXIC; OD=Ø5.0±0.15mm COLOR: UL813 BLACK
 - MARKING: RG58C/U COAXIAL CABLE 50 OHM RoHS
 2. CONNECTOR: BNC Male NICKEL-PLATED
 3. CONNECTOR: SMA Male GOLD-PLATING
 4. MOLDING SR: 45Pa PVC BLACK
 5. OPEN/SHORT MISS WIRE TEST 100%
 6. CONDUCTOR RESISTANCE $\leq 36.7\Omega/km$
 7. INSULATION RESISTANCE $\geq 2M\Omega$ DC300V 0.01Sec
- ALL MATERIALS SHOULD ACCORD WITH RoHS STANDARD.

PIN OUT:

CENTER	CENTER
SHELL	SHELL



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		EAR NO.		Amphenol Cables on Demand	
DECIMALS	±.XX	DRAWN	DATE	20 VALLEY ST. ENDICOTT, NY 13760	
"X	±.X	LF	20/Aug/09	RG58C/U SMA M/BNC M	
XX	±.XX	CHECKED	20/Aug/09		
XXX	±.XXX	BA			
THIRD ANGLE PROJECTION		RES' ENG		SIZE	DWG. NO.
		MEG ENG		A	CO-058SMABNCO-XXX
DWD FILE:				SCALE	SHEET
					OF

NOTES: UNLESS OTHERWISE SPECIFIED