



S21 TRANS LOG MAG.
▶0.000 dB 0.200 dB/DIV

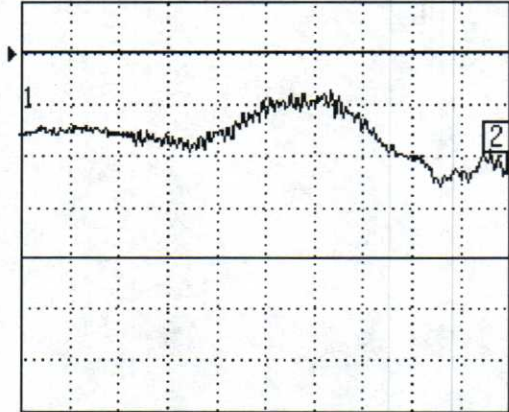


18.000000 GHz 26.500000

S11 REFL LOG MAG.
▶0.000 dB 5.000 dB/DIV

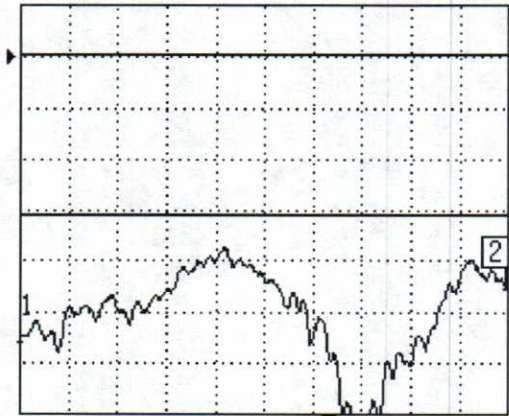


18.000000 GHz 26.500000

S22 REFL LOG MAG.
▶0.000 dB 5.000 dB/DIV

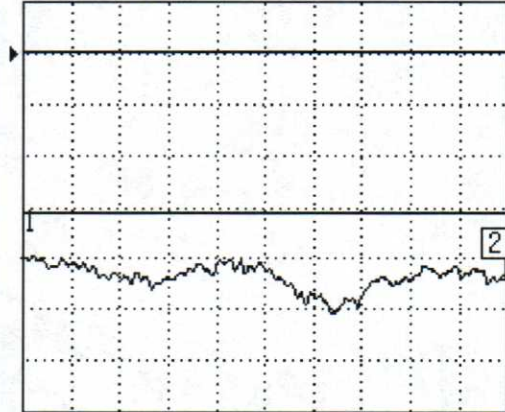

18.000000 GHz 26.500000

S12 TRANS LOG MAG.
▶0.000 dB 5.000 dB/DIV

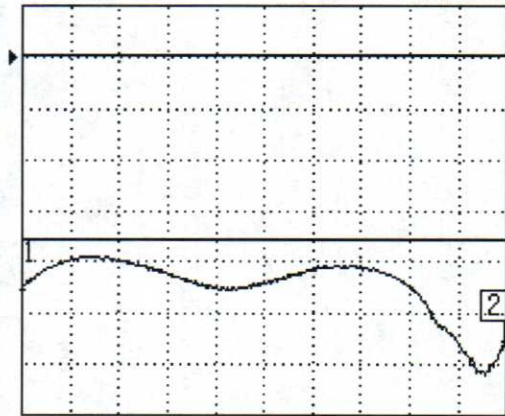

18.000000 GHz 26.500000

CH 1 - S21
REFERENCE PLANE
0.0000 mm

MARKER 2
26.500000 GHz
-0.476 dB

MARKER TO MAX
MARKER TO MIN

1 18.000000 GHz
-0.324 dB

▶MARKER READOUT
FUNCTIONS

D3I1826 - Isolator

Isolation: 18 dB Min

Insertion Loss: 0.80 dB Max

VSWR: 1.40:1 Max