
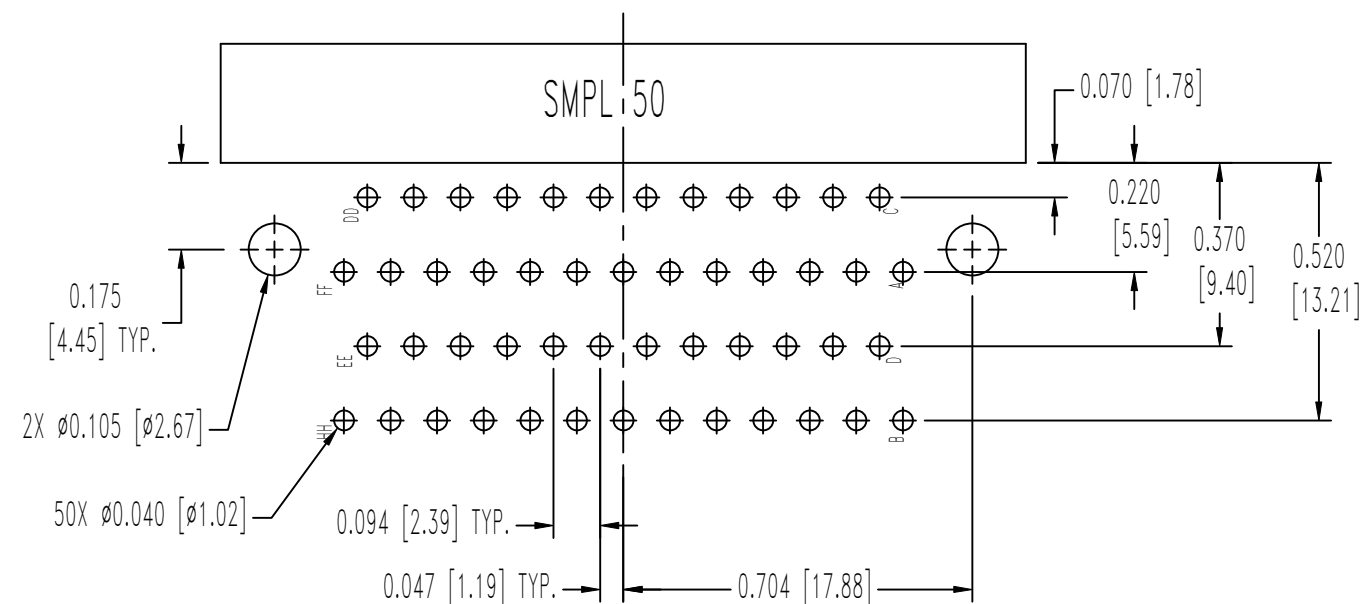
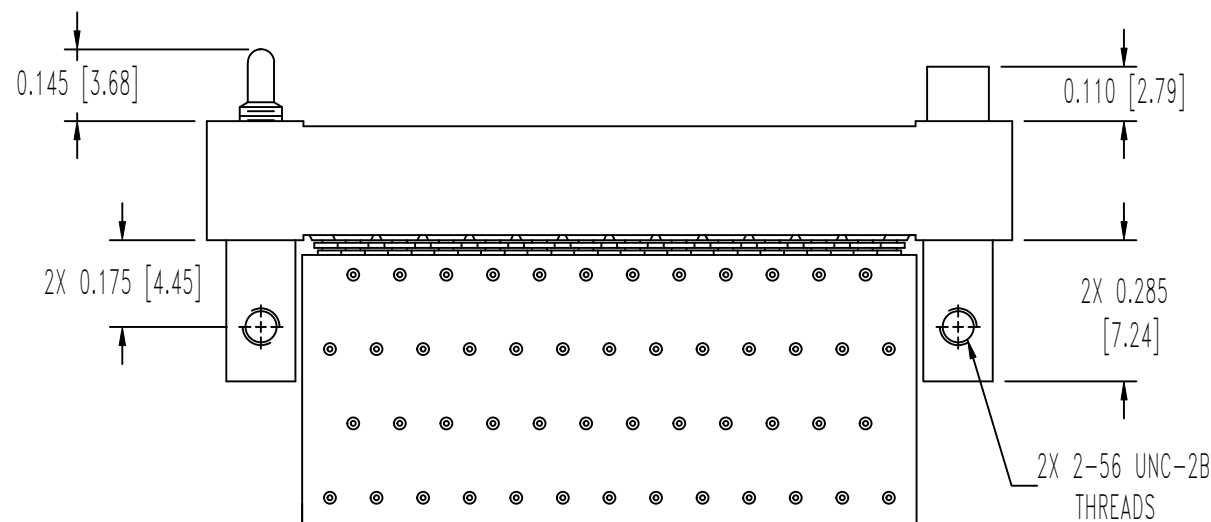
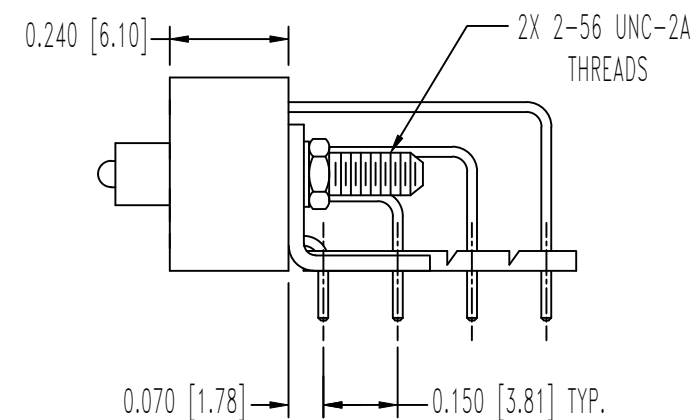


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
2-27-12	NC	ECO 35254	COLE	MP	COLE
12-04-17	A	ECO 57910	RK	ND	AP

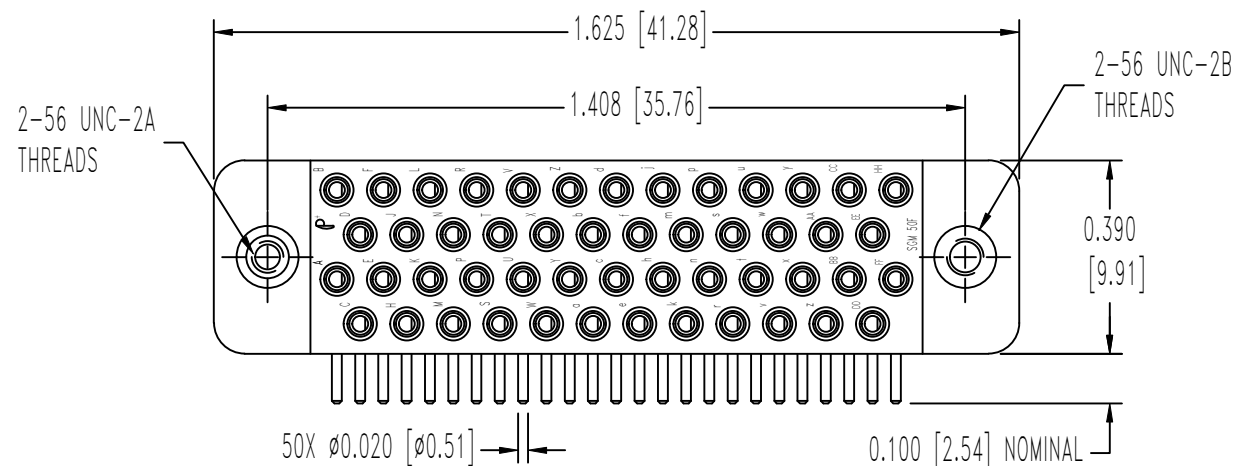

PRINTED BOARD HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:

- INSULATOR: GLASS FILLED DAP PER ASTM-D-5948 TYPE SDG-F. COLOR GREY.
- CONTACTS: PRECISION MACHINED COPPER ALLOY, 0.000015 [0.38µ] GOLD OVER NICKEL PLATE.
- JACKSCREWS: STAINLESS STEEL, PASSIVATED.
- MOUNTING BRACKETS: PHOSPHOR BRONZE, ZINC PLATE WITH CHROMATE SEAL.
- HEX NUTS AND LOCK WASHERS: STAINLESS STEEL, PASSIVATED.
- ALIGNMENT BAR: GLASS FILLED POLYESTER, UL 94V-0, COLOR: BLACK.

- 2. DETAILED PRODUCT, ELECTRICAL AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY RECTANGULAR PRODUCT PUBLICATION AT CONNECTPOSITRONIC.COM.
- 3. CONNECTORS ARE COMPLIANT PER CURRENT ROHS DIRECTIVE.
- 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

	POSITRONIC INDUSTRIES INC. www.connectpositronic.com		FSCM 28198
	DECIMAL TOL. ±0.015 [0.38]	SCALE N.T.S.	DRAWN BY MP
TITLE SMPL50S0T0LB/AA			
ANGULAR TOL. ±5°	DATE 2-27-12	DRAWING NUMBER SK13764	REV. A