

TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

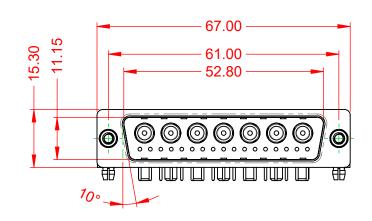




.X±0.25.XX±0.13.XXX±0.05

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	

WITHSTANDING VOLTAGE:

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY				
	COMBINATION D-SUB		COMBINATION D-SUB		DRAWN:	C.B	DATE: JAN. 01/20)19
			CHECKED:		DATE:			
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (I	IN C.A.D. 1:1)	SHEET 1 OF	2			
	TORONTO, ONTARIO CANADA SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE		DRAWING N	UMBER: 629-24W	7240-3N5	ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE MANUFACTURE OR SALE OF APPARA' WITHOUT WRITTEN PERMISSION.	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUME	BER: 629-24W	7240-3N5	1			



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

