

CGA5L3X7R2E104K160AE

TDK Item Description : CGA5L3X7R2E104KT***S



Equivalent C3216X7R2E104K for Automotive

Application & Main Feature

Automotive Grade (Soft Termination)

Series

CGA5(3216) [EIA CC1206]



Dimensions

L	3.20mm +0.4,-0.2mm
W	1.60mm +0.3,-0.2mm
T	1.60mm +0.3,-0.2mm
B	0.20mm Min.
G	1.00mm Min.

Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

Rated Voltage

2E (250Vdc)

Capacitance

100nF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor

3% Max.


Insulation Resistance

5Gohm Min


AEC-Q200

Yes


**|Z|, ESR vs. Freq. Characteristics
(Simulation Data)**

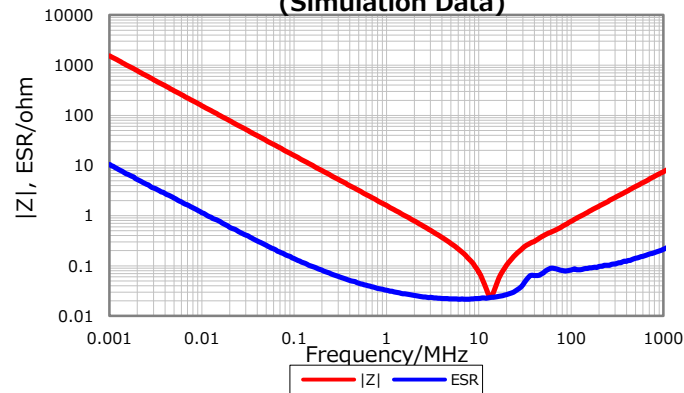


Cap. vs. Freq. Characteristic

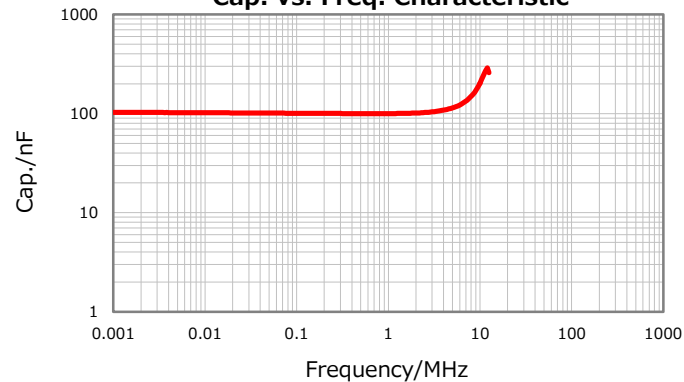


DC Bias Characteristic

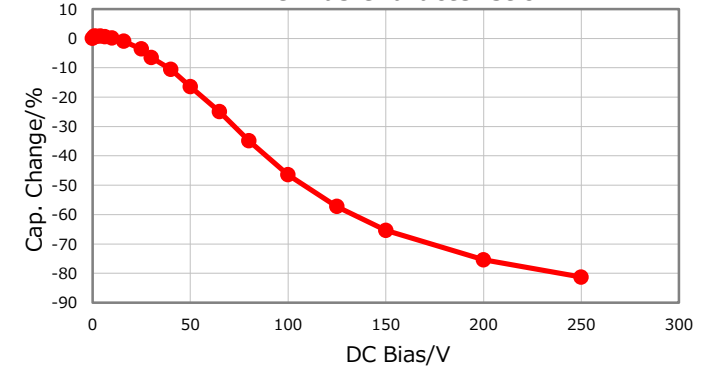

Temperature Characteristics

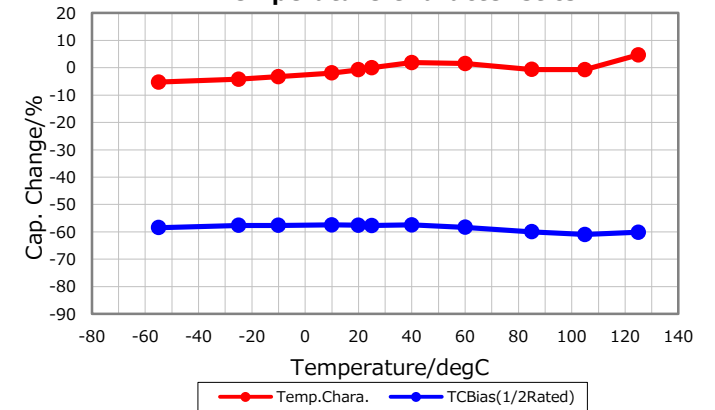

Ripple Temperature Rise Characteristics

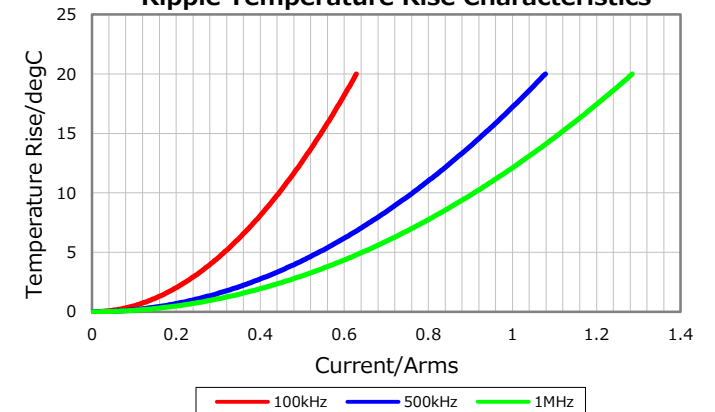

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.

March 17, 2017