


COIL: @ +25 °C
 RESISTANCE 200 OHMS ± 10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 6.2 VDC
 MUST RELEASE _____

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 3.5 MS MAX
RELEASE 3.0 MS MAX
CONTACT BOUNCE 1 MS MAX

CUSTOMER DATA SHEET

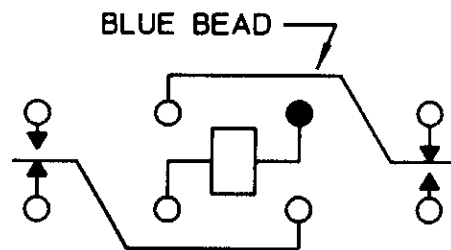

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. R.B. 8/1/94 CK. *8/1/94*

COMMUNICATIONS INSTRUMENTS, INC.

CUST. P & B
 CUST. NO. HCM-11D-12

TYPE "HFW" RELAY

HFW1201S276