



.XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	1

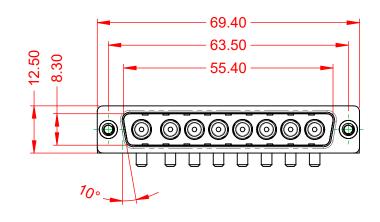




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	20A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

			SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	COMBINATION	COMBINATION D-SUB		DATE: JAN. 01/20	19	
				DATE:		
	EDAG INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
			DRAWING NUMBER: 629-8W8-	·640-2T4	ISSUE	
			PART NUMBER: 629-8W8-	·640-2T4	1	

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

			EDAC I TORONTO, C CANAI
YOUR	CONN	ECTION T	O QUALITY & S

WITHSTANDING VOLTAGE:

