

	т	ם ا		п	1	Π		D		C		
4			V Thread	ØS								
ယ				Keying Shown	as example					LA	YOUT SHOV	VN AS EXA
				Reying Shown	as example		_					
	CHARACTERISTICS -Standard : Based on MI	L-DTL-38999 Series III			Connector Dim	dimension Nominal						
CV	-Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability	<ul> <li>Composite</li> <li>Olive drab Cadmium</li> <li>Thermoplastic</li> <li>Copper Alloy</li> <li>Silicon Elastomer</li> <li>Gold over copper Alloy</li> <li>500 Mating cycles</li> </ul>			ØS Z' VV THREAD	29.4 Max 31.5 Max M18x1-6g					of the Proc	ducts which either of th mendatior Country FR
_	-Salt Spray	contacts and Accessories : -65°C to +175°C : 2000 hours : 17.2 g ± 10%	S					A ISS Designe	DATE	First Release Latest modificatio Date:	on - by	
	BASIC SERIES: SHELL TYPE : Plug with CONTACT TYPE : Stan SHELL SIZE : 13 PLATING : J = C		- 13 J	04 P D	CON	ORIEN TACT TYPE : PIN(50 CONTACT LAY0		SCA NA		www	General Tolera ±-	nces: -
			1	1	1		4	A	3			513J04
	Н	G		F		E	/	D		С		

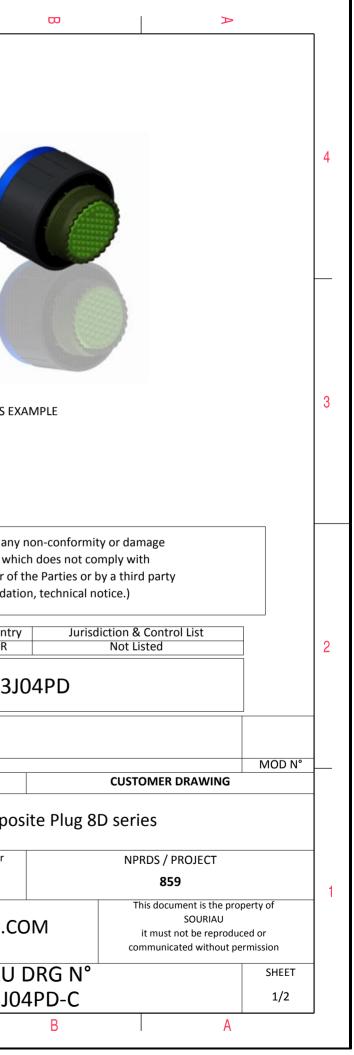

-	<u>т</u>	۵	וד-	m	D	0
		Contact Layout				
4	×	$ \begin{array}{c}                                     $				
	Conta position A B C D Shell Arrangement Ni size no. c 13 -4	+.000 (0.00) +.150 (3.81) +.146 (3.71) +.035 (0.89) +.000 (0.00)083 (2.11) 146 (3.71) +.035 (0.89)				
ω						
	1					
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
						PN: 8D513
						016 First Release
_					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Comp
<u> </u>					SCALE	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.
					FORMAT A3	SOURIAL 8D513J
L	Н	G	F	E	D	C

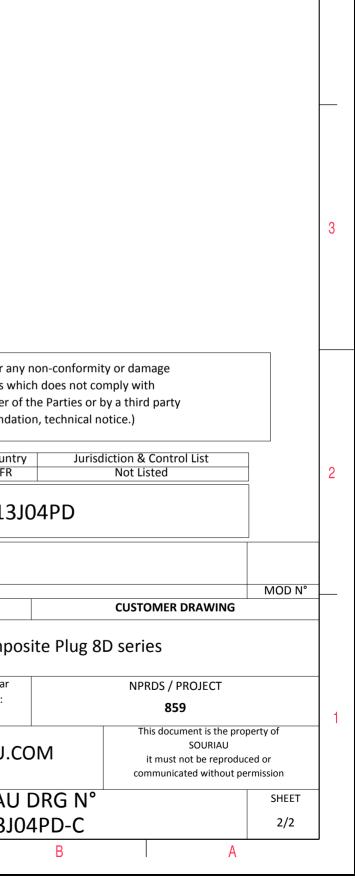

4