
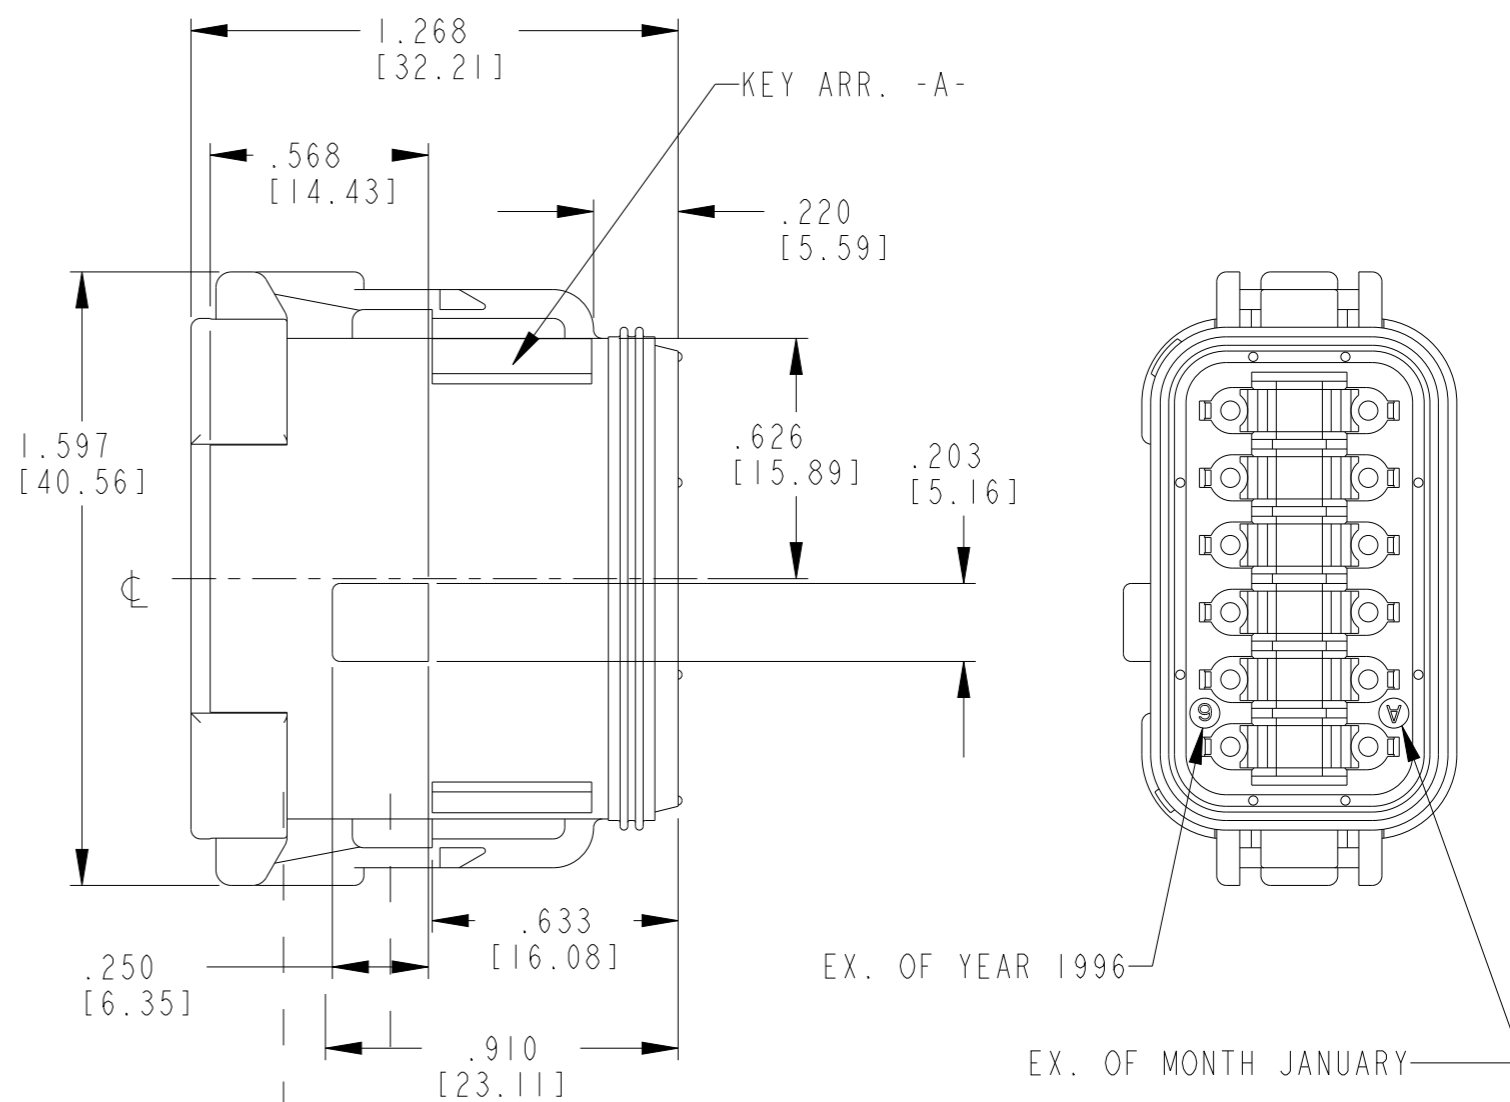


CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	WIRE RANGE [mm ²]
16	.088 [2.23]	.145 [3.68]	14-18 AWG [2.0-0.75 mm ²]

P	LTR	DESCRIPTION	DATE	DWN	APVD
	NC	NEW RELEASE PER E.O. P15844	11JAN1999	-	RDR
	A	REVISED PER E.O. P19396	24OCT2006	-	RDR
	AI	REVISED PER PCN E-21-003625	05APR2021	MK	IG

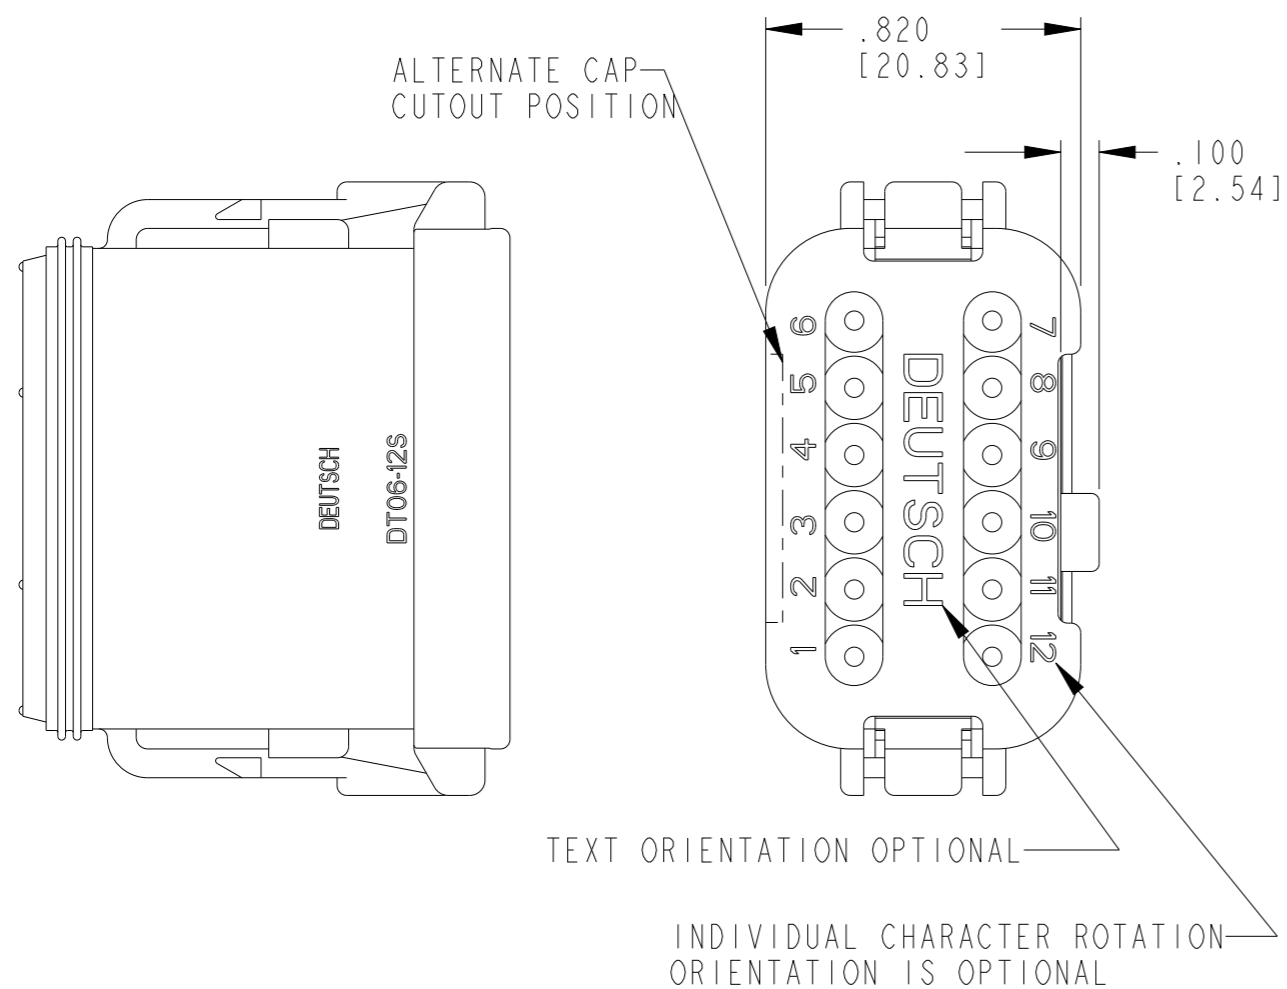

PLUG INSERTS INTO RCPT. WITHIN THESE DISTANCES

DATE LEGEND

4. PLUG MATES WITH DT04-12PA-****, DT13-12PA-****, DT15-12PA-****

3. PLUG UTILIZES WEDGE NUMBER W12S-P012, SOLD SEPARATELY.

2 MATERIAL: SHELL: HOUSING: PA66 GF15: COLOR BLACK
 GROMMET: VMQ (RED-ORANGE)
 FRONT SEAL: VMQ (RED-ORANGE)

1. FOR MORE INFO SEE ENVELOPE DWG.0425-015-0000. CONSULT FACTORY FOR CONTACT SPECIFICATION AND APPLICATION.

YEAR TO BE REPRESENTED BY LAST NUMERICAL DIGIT
MONTH USES SEQUENTIAL ALPHA CHARACTERS, EX: A=JANUARY...

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. THEIS 25NOV1998	STE TE Connectivity	
DIMENSIONS: IN [mm]		CHK R. MILLIGAN 25OCT2006		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. REED 29OCT2006	NAME 12 WAY PLUG -EP08 MOD	
0 PLC ±-		PRODUCT SPEC 108-151009	KEY ARR -A-	
1 PLC ±-		APPLICATION SPEC 114-151009	DT SERIES	
2 PLC ±-		WEIGHT 16 GR	SIZE A3	CAGE CODE 00779
3 PLC ±.025[0.63]		CUSTOMER DRAWING	DRAWING NO C=DT06-12SA-EP08	RESTRICTED TO -
4 PLC ±-			SCALE 2:1	SHEET 1 OF 1
ANGLES ±-				REV AI
FINISH				