


THIS DRAWING IS A CONTROLLED DOCUMENT
REV: US 1906036

USED ON

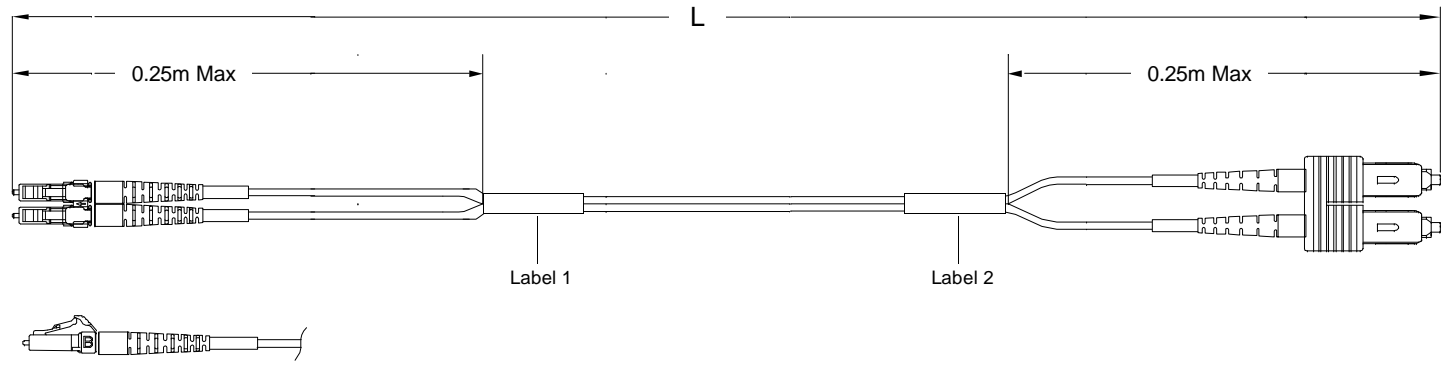

Left Side
 Connector(s): LC-Duplex Secure
 Mode: MM
 Housing Color: Rose
 Geom. Spec: N/A

Fiber Path
 A - _____ - B
 B - _____ - A

Right Side
 Connector(s): SC-Duplex
 Mode: MM
 Housing Color: Beige
 Geom. Spec: N/A

- Notes:
- 1 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
 - 2 Includes dust caps (not shown on print).
 - 3 IL tested at 1300nm.
 - 4 Label 2 will not be present on any cable assembly less than 5 meters long.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS, INC. IT IS TO BE USED ONLY FOR THE PURPOSES AND APPLICATIONS SPECIFIED IN THE DRAWING. IT IS NOT TO BE DISCLOSED TO ANY OTHER PERSONS OR ORGANIZATIONS WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA 17105-3608

LOC	
CE	
DIST	16

A	Rev Per EC#	RELEASE	4/22/2009	-	JB		
P	LTR	REVISION RECORD	DATE	DIN	APVD		

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
meters	0 PLC ± .
	1 PLC ± .
	2 PLC ± .
	3 PLC ± .
	4 PLC ± .

Restricted To:

DIN	Cable Assy Configurator	MATERIAL		HEAT TREAT	
CHK	James Barry	Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APVD	James Barry				
NAME	FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, LC-Duplex Secure to SC-Duplex				
SCALE	NTS	SIZE	A2	DRAWING NO	C- 1906036
SHEET	1 of 4	REV	A		

USED ON

BFC#D
THIS DRAWING IS A CONTROLLED DOCUMENT.

Part #	L (meters)	L (feet)	LC-Duplex Secure, Rose		SC-Duplex, Beige	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-1906036-1	0.950 - 1.050	3.11 - 3.44	0.5	-	0.5	-
0-1906036-2	1.950 - 2.050	6.39 - 6.72	0.5	-	0.5	-
0-1906036-3	2.950 - 3.050	9.67 - 10.00	0.5	-	0.5	-
0-1906036-4	3.920 - 4.080	12.86 - 13.38	0.51	-	0.51	-
0-1906036-5	4.920 - 5.080	16.14 - 16.66	0.51	-	0.51	-
0-1906036-6	5.920 - 6.080	19.42 - 19.94	0.51	-	0.51	-
0-1906036-7	6.920 - 7.080	22.70 - 23.22	0.51	-	0.51	-
0-1906036-8	7.920 - 8.080	25.98 - 26.50	0.51	-	0.51	-
0-1906036-9	8.850 - 9.150	29.03 - 30.01	0.51	-	0.51	-
1-1906036-0	9.850 - 10.150	32.31 - 33.30	0.52	-	0.52	-
1-1906036-1	10.850 - 11.150	35.59 - 36.58	0.52	-	0.52	-
1-1906036-2	11.850 - 12.150	38.87 - 39.86	0.52	-	0.52	-
1-1906036-3	12.850 - 13.150	42.15 - 43.14	0.52	-	0.52	-
1-1906036-4	13.850 - 14.150	45.43 - 46.42	0.52	-	0.52	-
1-1906036-5	14.850 - 15.150	48.72 - 49.70	0.52	-	0.52	-
1-1906036-6	15.840 - 16.160	51.96 - 53.01	0.52	-	0.52	-
1-1906036-7	16.830 - 17.170	55.21 - 56.33	0.53	-	0.53	-
1-1906036-8	17.820 - 18.180	58.46 - 59.64	0.53	-	0.53	-
1-1906036-9	18.810 - 19.190	61.71 - 62.95	0.53	-	0.53	-
2-1906036-0	19.800 - 20.200	64.96 - 66.27	0.53	-	0.53	-
2-1906036-1	20.790 - 21.210	68.20 - 69.58	0.53	-	0.53	-
2-1906036-2	21.780 - 22.220	71.45 - 72.90	0.53	-	0.53	-
2-1906036-3	22.770 - 23.230	74.70 - 76.21	0.53	-	0.53	-
2-1906036-4	23.760 - 24.240	77.95 - 79.52	0.54	-	0.54	-
2-1906036-5	24.750 - 25.250	81.20 - 82.84	0.54	-	0.54	-
2-1906036-6	25.740 - 26.260	84.44 - 86.15	0.54	-	0.54	-
2-1906036-7	26.730 - 27.270	87.69 - 89.46	0.54	-	0.54	-
2-1906036-8	27.720 - 28.280	90.94 - 92.78	0.54	-	0.54	-
2-1906036-9	28.710 - 29.290	94.19 - 96.09	0.54	-	0.54	-
3-1906036-0	29.700 - 30.300	97.44 - 99.40	0.55	-	0.55	-
3-1906036-1	30.690 - 31.310	100.68 - 102.72	0.55	-	0.55	-
3-1906036-2	31.680 - 32.320	103.93 - 106.03	0.55	-	0.55	-
3-1906036-3	32.670 - 33.330	107.18 - 109.35	0.55	-	0.55	-
3-1906036-4	33.660 - 34.340	110.43 - 112.66	0.55	-	0.55	-
3-1906036-5	34.650 - 35.350	113.68 - 115.97	0.55	-	0.55	-
3-1906036-6	35.640 - 36.360	116.92 - 119.29	0.55	-	0.55	-
3-1906036-7	36.630 - 37.370	120.17 - 122.60	0.56	-	0.56	-
3-1906036-8	37.620 - 38.380	123.42 - 125.91	0.56	-	0.56	-
3-1906036-9	38.610 - 39.390	126.67 - 129.23	0.56	-	0.56	-
4-1906036-0	39.600 - 40.400	129.92 - 132.54	0.56	-	0.56	-
4-1906036-1	40.590 - 41.410	133.16 - 135.85	0.56	-	0.56	-
4-1906036-2	41.580 - 42.420	136.41 - 139.17	0.56	-	0.56	-


Qty	U of M	Description	Item No.
2	piece	SC Simplex Housing, Beige	10
1	piece	LC Duplex clip, black	9
2	piece	SC Duplex Clip	8
AR	meter	2 fiber, 62.5/125, 2.0mm, Twinzip, Orange, OFNR (Riser)	7
2	piece	Trace Label	6
4	piece	LC, SC, FC Straight Boot, Beige	5
2	piece	2.5mm ferrule cover	4
4	piece	Eyelet/Shrink tube assembly - White	3
2	piece	LC Connector Assy, 1.6mm-2.0mm, MM	2
2	piece	CONN SUBASSY, MM, SC 1.6MM	1

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION AND IS NOT TO BE DISCLOSED TO ANY OTHER PARTY WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC
CE
DIST
16

CAC Customer Layout Rev: D

A	Rev Per EC#	RELEASE	4/22/2009	-	JB
P	LTR	REVISION RECORD	DATE	DIN	APVD

RESTRICTED TO:


RESTRICTED TO:


DIN	Cable Assy Configurator		MATERIAL	HEAT TREAT
OK	James Barry		-	-
APVD	James Barry		AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME	FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, LC-Duplex Secure to SC-Duplex			
SCALE	SIZE	DRAWING NO	SHEET	REV
NTS	A2	C- 1906036	2 of 4	A

8 7 6 5 4 3 2 1

D
C
B
A

Part #	L (meters)	L (feet)	LC-Duplex Secure, Rose		SC-Duplex, Beige	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
4-1906036-3	42.570 - 43.430	139.66 - 142.48	0.56	-	0.56	-
4-1906036-4	43.560 - 44.440	142.91 - 145.80	0.57	-	0.57	-
4-1906036-5	44.550 - 45.450	146.16 - 149.11	0.57	-	0.57	-
4-1906036-6	45.540 - 46.460	149.40 - 152.42	0.57	-	0.57	-
4-1906036-7	46.530 - 47.470	152.65 - 155.74	0.57	-	0.57	-
4-1906036-8	47.520 - 48.480	155.90 - 159.05	0.57	-	0.57	-
4-1906036-9	48.510 - 49.490	159.15 - 162.36	0.57	-	0.57	-
5-1906036-0	49.500 - 50.500	162.40 - 165.68	0.58	-	0.58	-
5-1906036-1	50.490 - 51.510	165.64 - 168.99	0.58	-	0.58	-
5-1906036-2	51.480 - 52.520	168.89 - 172.30	0.58	-	0.58	-
5-1906036-3	52.470 - 53.530	172.14 - 175.62	0.58	-	0.58	-
5-1906036-4	53.460 - 54.540	175.39 - 178.93	0.58	-	0.58	-
5-1906036-5	54.450 - 55.550	178.64 - 182.25	0.58	-	0.58	-
5-1906036-6	55.440 - 56.560	181.88 - 185.56	0.58	-	0.58	-
5-1906036-7	56.430 - 57.570	185.13 - 188.87	0.59	-	0.59	-
5-1906036-8	57.420 - 58.580	188.38 - 192.19	0.59	-	0.59	-
5-1906036-9	58.410 - 59.590	191.63 - 195.50	0.59	-	0.59	-
6-1906036-0	59.400 - 60.600	194.88 - 198.81	0.59	-	0.59	-
6-1906036-1	60.390 - 61.610	198.12 - 202.13	0.59	-	0.59	-
6-1906036-2	61.380 - 62.620	201.37 - 205.44	0.59	-	0.59	-
6-1906036-3	62.370 - 63.630	204.62 - 208.75	0.59	-	0.59	-
6-1906036-4	63.360 - 64.640	207.87 - 212.07	0.6	-	0.6	-
6-1906036-5	64.350 - 65.650	211.12 - 215.38	0.6	-	0.6	-
6-1906036-6	65.340 - 66.660	214.37 - 218.70	0.6	-	0.6	-
6-1906036-7	66.330 - 67.670	217.61 - 222.01	0.6	-	0.6	-
6-1906036-8	67.320 - 68.680	220.86 - 225.32	0.6	-	0.6	-
6-1906036-9	68.310 - 69.690	224.11 - 228.64	0.6	-	0.6	-
7-1906036-0	69.300 - 70.700	227.36 - 231.95	0.61	-	0.61	-
7-1906036-1	70.290 - 71.710	230.61 - 235.26	0.61	-	0.61	-
7-1906036-2	71.280 - 72.720	233.85 - 238.58	0.61	-	0.61	-
7-1906036-3	72.270 - 73.730	237.10 - 241.89	0.61	-	0.61	-
7-1906036-4	73.260 - 74.740	240.35 - 245.20	0.61	-	0.61	-
7-1906036-5	74.250 - 75.750	243.60 - 248.52	0.61	-	0.61	-
7-1906036-6	75.240 - 76.760	246.85 - 251.83	0.61	-	0.61	-
7-1906036-7	76.230 - 77.770	250.09 - 255.15	0.62	-	0.62	-
7-1906036-8	77.220 - 78.780	253.34 - 258.46	0.62	-	0.62	-
7-1906036-9	78.210 - 79.790	256.59 - 261.77	0.62	-	0.62	-
8-1906036-0	79.200 - 80.800	259.84 - 265.09	0.62	-	0.62	-

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND IS NOT TO BE RELEASED TO ANY OTHER PARTY WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC
CE
DIST
16

A	Rev	Per	EC#	RELEASE	4/22/2009	-	JB			
P	LTR			REVISION RECORD	DATE	DN	APVD			

RESTRICTED TO:

DIMENSIONS: meters

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 9 PLC ± .1
 1 PLC ± .1
 2 PLC ± .1
 3 PLC ± .1
 4 PLC ± .1

DIN	Cable Assy Configurator	MATERIAL		HEAT TREAT	
CHK	James Barry	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APVD	James Barry				
NAME	FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, LC-Duplex Secure to SC-Duplex				
SCALE	NTS	SIZE	A2	DRAWING NO	C- 1906036
SHEET	3 of 4	REV	A		

A B C D

Label 1

Per specification 107-1645-1



Trace # - Bar Code

Trace # - Human Readable


Part Number

Country of Origin

This label is used on all lengths on this drawing.

Label 2

Per specification 107-1645-1



Trace # - Bar Code

Trace # - Human Readable

Part Number

Country of Origin

This label is used on all lengths on this drawing.

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND IS NOT TO BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC
CE
DIST
16

A	Rev Per EC#	RELEASE	4/22/2009	-	JB		
P	LTR	REVISION RECORD	DATE	DIN	APVD		

DIMENSIONS: meters	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	± .
1 PLC	± .
2 PLC	± .
3 PLC	± .
4 PLC	± .

Restricted To:

DIN	Cable Assy Configurator	MATERIAL	HEAT TREAT	
CHK	James Barry	-	-	
APVD	James Barry	Tyco Electronics, Inc. Harrisburg, PA 17105-3608		
NAME	FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, LC-Duplex Secure to SC-Duplex			
SCALE	SIZE	DRAWING NO	SHEET	REV
NTS	A2	C- 1906036	4 of 4	A