




.XX ±0.13 .XXX ±0.05

_	
	ORIG
	1



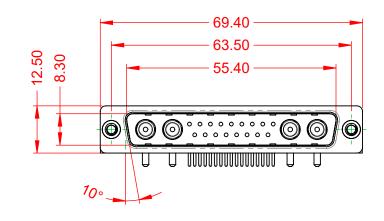




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



0	PERATING TEMPERATURE:	-55°C ~ 125°C
-	OWER/CO-AX CONTACT RATING: F PRESENT)	10A (CURRENT)
	GNAL CONTACT CURRENT RATING: GNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
	SULATOR RESISTANCE: ELECTRIC	5000MΩ min.

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/201	19
			CHECKED:	DATE:	
O	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
ES CY.	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-21W4250-1N4		ISSUE
			PART NUMBER: 629-21W	4250-1N4	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY

