
т	۵	н <b>п</b>	m	0





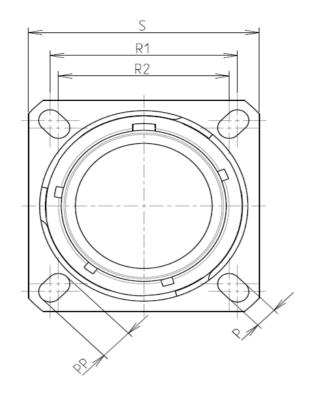

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Black Zinc Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	-65°C to +175°C
-Salt Spray	: 500 hours

: 13.92 g ± 10%

8D 0

G

11

Ζ

22

S


F

А

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

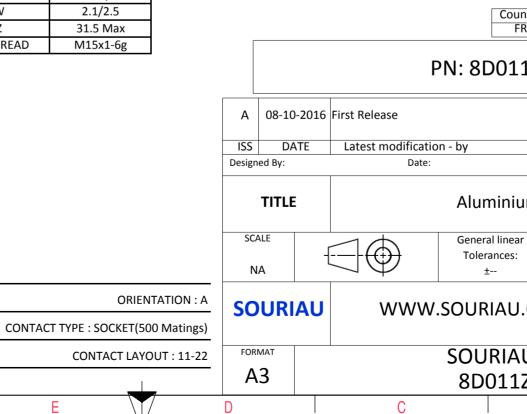

	Ξ		A		
					4
LS EXA	AMPLE				3
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)					
intry R	Jurisd	liction & Cont Not Listed	rol List		2
.1Z22SA					
	1			MOD N°	- -
customer drawing um Receptacle 8D series					
ar	NPRDS / PROJECT				
			59	erty of	1
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET	
.22	2SA-C B		A	1/2	J
	_	-			

,							
4	(	Contact Layout				E FLANGE RECEPTACLE (T' REAR MOUNTING R1	Panel Cu
	Ctc	20 0, 4#22D 11-22 X Y					ØA
ى	A B C D	1.905 1.905   1.905 -1.905   -1.905 -1.905   -1.905 1.905					Dim ØA ØAA R1 ØT
	-					SOURIAU shall no due to a use o the Specifications in (profession	f the Products
N							N: 8D01
					A ISS Designe	rst Release Latest modification Date:	- by
<u> </u>					SCA N/	$] \bigoplus$	Aluminiu General linear Tolerances: ±
	Н	G	F	E	FORM		SOURIAU SOURIA 8D011
					$\bigvee$		

Т

ш

т

G

0

