

AMY-110-S-C

~18° spot beam. Assembly with holder C compatible with LEDiL HEKLA. Black version.

SPECIFICATION:

Dimensions Ø 109.7 mm
Height 23.3 mm
ROHS compliant yes ①



MATERIALS:

ComponentTypeMaterialColourFinishAMY-110-SSingle lensPMMAclearAMY-110-HLD-CHolder CPCblack

ORDERING INFORMATION:


 Component
 Qty in box
 MOQ
 MPQ
 Box weight (kg)

 CP18557_AMY-110-S-C
 77
 77
 7
 8.6

» Box size: 480 x 280 x 300 mm



PRODUCT DATASHEET CP18557_AMY-110-S-C

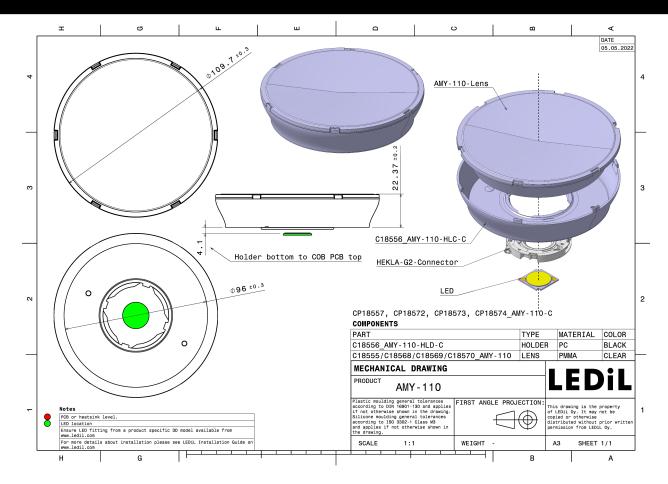

See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (SIMULATED):

bridgelux

LED V18 Gen 8

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 18.0° / 47.0°

Efficiency 87 % Peak intensity

4.2 cd/lm

LEDs/each optic


Light colour

White

Required components:

C16142_HEKLA-SOCKET-K

Bender Wirth: 462 Typ L8



bridgelux

LED

Vero SE 29

FWHM / FWTM Efficiency

29.0° / 64.0° 82 %

Peak intensity

2.1 cd/lm


LEDs/each optic

1

Light colour

White

Required components:



bridgelux

LED

Vesta TW 18mm (31W) DP

FWHM / FWTM

20.0° / 48.0°

Efficiency

86 %

Peak intensity

4.1 cd/lm

LEDs/each optic


Light colour

Tunable White

Required components:

C16142_HEKLA-SOCKET-K

Bender Wirth: 462 Typ L8



CITIZEN

CLL03x/CLU03x

FWHM / FWTM Efficiency

14.0° / 36.0°

Peak intensity


92 % 7.1 cd/lm

LEDs/each optic Light colour

White

Required components:

F17438_HEKLA-G2-I



Published: 02/12/2022




OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 16.0° / 40.0°
Efficiency 92 %
Peak intensity 6.4 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17438_HEKLA-G2-I



Published: 02/12/2022



PRODUCT DATASHEET CP18557_AMY-110-S-C

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy