


1. Wiring Diagram.

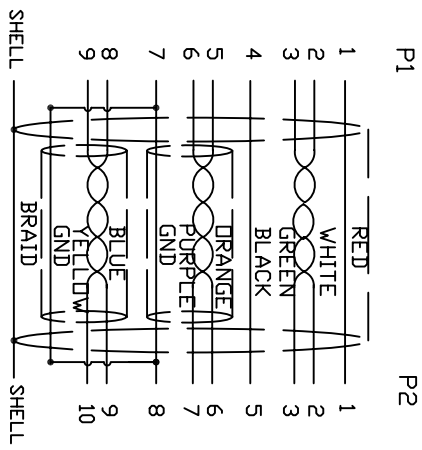

2. Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3. Each pcs with PE palybag

6	CORE	RH14.2*28.5*6.35mm	2		
5	CONN	USB3.0 MICRO B MAILE G/F BLACK	1		P2
4	PVC	45P PVC BLACK OVERMOLD	25g		
3	PE	LLDPE 500026 6201	16g		
2	CONN	USB3.0 A/M G/F BLUE	1		P1
1	CABLE	《28AWG (7/0.127T) *IP+D(7/0.127T)+AL+M》*2+28AWG (7/0.127T) *IP+24AWG(7/0.2T)*2C+A+D+B (11/6/0.12AM) OD5.5 BLACK	1		5000mm
NO.	PART NO.	DESCRIPTION		QTY	UNIT/REF
		BILL OF MATERIAL			

A	2015125	INITIAL RELEASE	2015/11/24
REVECHN#		DESCRIPTION	DATE
Cnc Tech,LLC		TITLE	DATE
DRAWN EDWIN LAI	11/24/15	USB3.0 A/M-MICRO B W/FERRULES,5M	103-1092-BL-F0500
CHECKED WENG	11/24/15	CUSTOMER P/NI:	REV
APPROVAL		CUSTOMER:	REV
		SHEET 1 OF 1	