

Electronic housing - HCS-C MINI C 3AAA 1 1 7035 - 2203151

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Handheld housing, C-Mini, light gray, front level closed, consisting of two half shells, two front plates, screws, front screws, battery compartment cover, and battery contacts, for 3 AAA batteries

Your advantages

- Item is from the HCS product range
- Suitable for handheld devices
- Ergonomic straight or staggered housing design
- ☑ Integration of LCD displays and membrane keypads
- ☑ Degree of protection: up to IP54
- ☑ Temperature range: -20 °C to +50 °C
- Shock-resistant ABS plastic
- Flammability rating UL 94-V0

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	4 055626 377049
GTIN	4055626377049

Technical data

Item properties

Туре	HCS-C MINI C 3AAA 1 1 7035
Order No.	2203151
Housing type	Handheld housing
Туре	straight
Battery compartment	3 x AAA

Measurements

Caption	Schematic representation – for additional information, see product range drawing in the Download Center
---------	---



Electronic housing - HCS-C MINI C 3AAA 1 1 7035 - 2203151

Technical data

Measurements

Width [w]	70.5 mm
Height [h]	110 mm
Depth [d]	26 mm
Front with faceplate	top, 1 x (49.8 mm x 17.8 mm)
	bottom, 1 x (49.8 mm x 17.8 mm)

Material specifications

Color (RAL)	light gray (7035)
Flammability rating according to UL 94	V0
Housing material	ABS

Hammer test

Specification	IEC 60068-2-75:2014-09
Impact energy	0.7 J
Number of drop cycles	5

Thermostability (ball thrust test)

Specification	IEC 60695-10-2:2014-02
Temperature	80 °C
Test duration	1 h
Force	20


Test for assessing the risk of fire (glow wire)

Specification	IEC 60695-2-11:2014-02
Temperature	850 °C
Time of exposure	30 s
Packaging information	
Pieces per package	1
Denomination packing units	Pcs.
Standards and regulations	
Flammability rating according to UL 94	VO

Drawings



Electronic housing - HCS-C MINI C 3AAA 1 1 7035 - 2203151

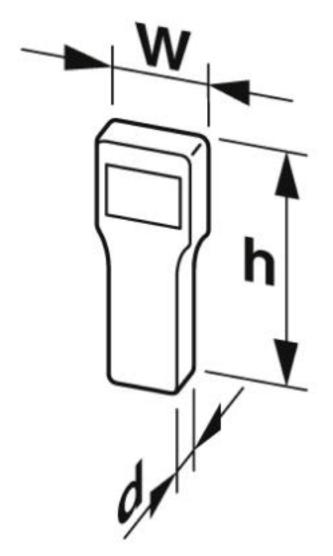

Dimensional drawing

Schematic representation - for additional information, see product range drawing in the Download Center

Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200 http://www.phoenixcontact.com