


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

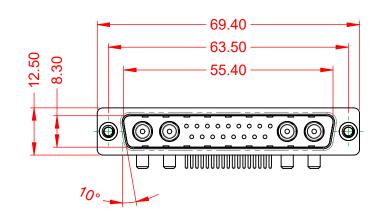




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: **INSULATOR RESISTANCE:** DIELECTRIC

WITHSTANDING VOLTAGE:

**OPERATING TEMPERATURE:** 


30A (CURRENT)

-55°C ~ 125°C

 $10m\Omega$  MAX.

5000MΩ min.

1000V AC rms



					SW REFERENCE NO.: 629 COMBO ASSEMBLY				
C	COMBINATION D-SUB			C.B	DATE: JAN. (	1/20	19		
					DATE:				
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (I	IN C.A.D. 1:1)	SHEET 1	OF	2		
	ORONTO, ONTARIO CANADA	CANADA OR USED AS THE BASIS FOR THE DRAWING NUM			1240-3NA		ISSUE		
YOUR CONNECTION TO QU	OUR CONNECTION TO QUALITY & SERVICE MANUFACTURE OR SALE OF APPARATL WITHOUT WRITTEN PERMISSION.			PART NUMBER: 629-21W4240-3NA			1		



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

