





ISSUE NUMBER	
ORIGINAL	

(1)

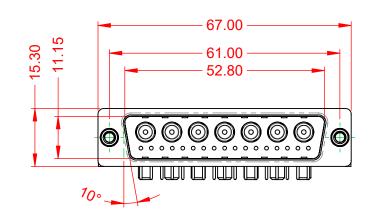




.XX ±0.13 .XXX ±0.05




MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDANCE)	ſ
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.	Į
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.	
WITHSTANDING VOLTAGE:	1000V AC rms	



SW REFERENCE NO.:		SW REFERENCE NO.: 629 C	9 COMBO ASSEMBLY		
	COMBINATION	D-SUB	DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
3		MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-24W	7240-5T4	ISSUE
			PART NUMBER: 629-24W	7240-5T4	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

