

I I I I I I I I I I I I I I I I I I I	G	П	m	0



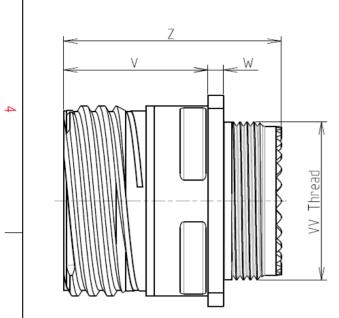

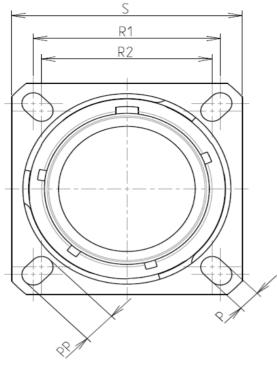

Keying Shown as example

## CHARACTERISTICS

ω

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 09

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy  $0.8 \mu m$  minimum : 500 Mating cycles -Durability -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C -Salt Spray : 500 hours

: 23.93 g ± 10%

8D 0

G

09

-

Κ

98

Ρ

F

А

Connector di Dim Р PP R1 R2 S V W Ζ VV THREAD

	1													
т			D			0			Φ			A		-
														4
~							YOUT SHOWI							3
nector dimension Nomi 3.25± 5.49± 18.2 15.0 23.8± 20.83+0, 2.1/2 31.5 M	inal :0.2 :0.3 :0.3 :0.4 :0.5 :0.3 :0.4 :0.5 :0.3 :0.4 :0.5 :					the Specification	e of the Produ s issued by eit ional recomm	icts whicl ther of th	h does not con he Parties or b n, technical no	mply with by a third p otice.)	oarty ontrol List			2
AD M12x1	1-6g		PN: 8D009K98PA											
			A	03-10	-2016	First Release								
	ISS     DATE     Latest modification - by       Designed By:     Date:     CUSTOMER DRAWING					MOD N°	-							
			TITLE     Stainless Steel Receptacle 8D series						_					
SCALE				General linear NPRDS / PROJECT Tolerances: ± <b>859</b>				1						
ORIENTATION : A CONTACT TYPE : PIN(500 Matings)		SOURIAU		AU	WWW.SOURIAU.COM			M	This document is the property of SOURIAU it must not be reproduced or communicated without permission			ed or		
CONTACT LAYOUT : 09-98		FORMAT			1			DRG N°				SHEET	_	
				3			8D00	)9K98	8PA-C	I			1/2	
E	$\bigvee$		D		I	С	1		В			А		

r	Ŧ	۵	гт —	m		0	
		Contact Layout					Panel Cutou
4	-X	$ \begin{array}{c}                                     $			ħ	SQUARE FLANGE RECEPTACLE (TY REAR MOUNTING	
	Shell Arrangement Numb size no. 100 conta 9 -98 3	n X-axis Y-axis (mm) (mm) +065 (1.55) +038 (0.97) +.000 (0.00)075 (1.91) 065 (1.65) +.038 (0.97) - er of Size Service Contact Supersedes acts contacts rating location			£ _		ØT
ω							Dim ØA ØAA R1 ØT
	-				[		
	-					the Specifications is	f the Products wh
N						PI	Countr FR N: 8D0091
					A 03-10-20	16 First Release	
					ISS DATE Designed By:	Latest modification Date:	- by
					TITLE		Stainless Ste
<u> </u>					SCALE NA		General linear Tolerances: ±
					SOURIA	U WWW.S	Souriau.c
					FORMAT A3		SOURIAU 8D009K
	Н	G	F	E	D	С	

