


-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.37-IPX4LLK-MCMGT-4IN (4 INCHES)
 CB1.37-IPX4LLK-MCMGT-10IN (10 INCHES)

REVISIONS				
REV	ECR	DESCRIPTION	DRAWN	DATE
1		PRODUCTION RELEASE	M. LARSEN	06/07/2022

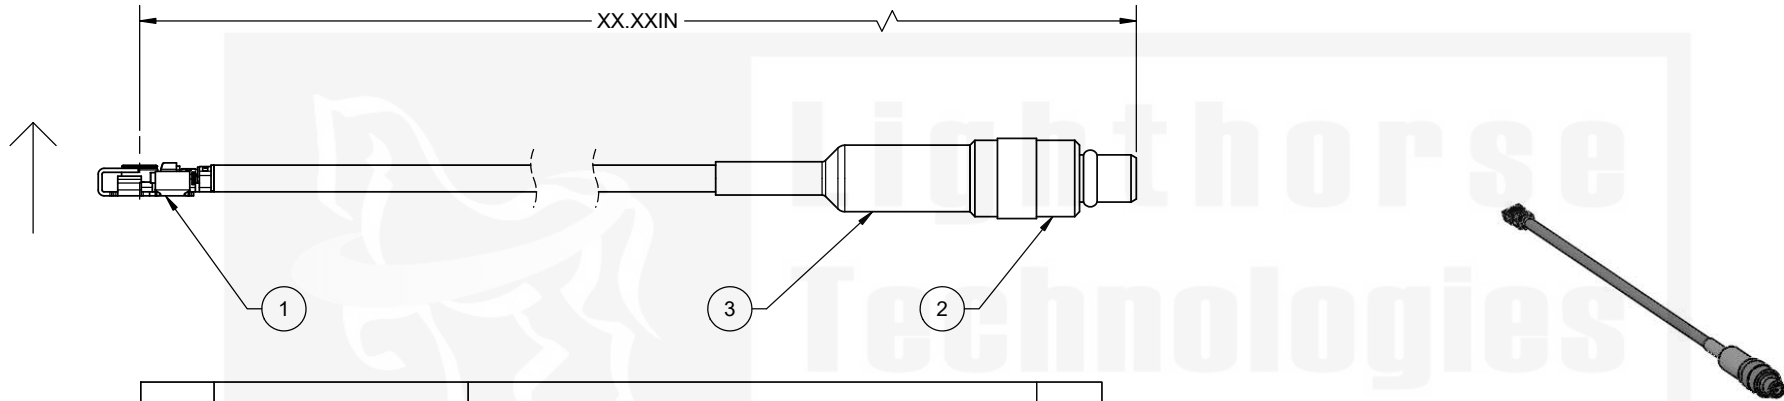

ITEM	PART NUMBER	DESCRIPTION	QTY
1	CB1.37-IPX4LLK-500MM	IPX4LLK (MHF4L LK) LOCKING, RHT ANGLE, JACK, USING 1.37 CABLE, BLACK, (I-PEX 20632-001R-37)	0.5
2	MCSM11GT-178	MMCX, STRAIGHT, PLUG, CABLE CRIMP	1
3	1635F-1/8"	.125 (1/8) DIA, .75 LENGTH, GREEN	1

SCALE: NONE

IPX® AND MHF® ARE REGISTERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING			Lighthouse Technologies San Diego, CA WWW.RFCONNECTOR.COM	
TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS X = ±0.5 XX = ±0.25 XXX = ±0.13 ANGLE = ±30°			TITLE: CABLE ASSEMBLY, IPX4LLK (MHF4L LK), LOCKING, R/A JACK, CRIMP TO MMCX, PLUG, CRIMP USING 1.37 MICRO COAX	
THIRD ANGLE PROJECTION		CUSTOMER APPROVAL		
SIGN / DATE:		SIZE	PART/DWG. NO:	REV
ENG APPR.	P. BURDGE 06/07/2022	B	CB1.37-IPX4LLK-MCMGT-xxIN	A
CHECKED	M. HELD 06/07/2022			
DRAWN	M. LARSEN 06/07/2022	SCALE: 4:1	FILE NAME	SHEET 1 OF 1
NAME	DATE			

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED, THIS DOCUMENT CONTAINS LIGHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHORSE TECHNOLOGIES. LIGHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPYRIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

