



(1)

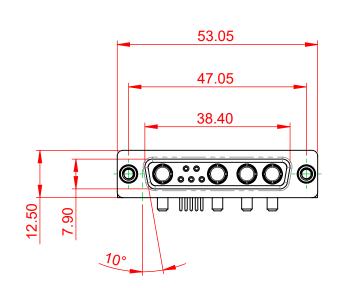



NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C



.XX ±0.13

.XXX ±0.05


INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
COMBINA			DATE: JAN. 01/20	19	
			DATE:		
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-9W4	-640-2NE	ISSUE	
YOUR CONNECTION TO QUALITY & SER	/ICE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-9W4	-640-2NE	1	

5000MΩ min.

1000V AC rms





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

