


				 -
Ŧ	Q	нт – – – – – – – – – – – – – – – – – – –	m	C C



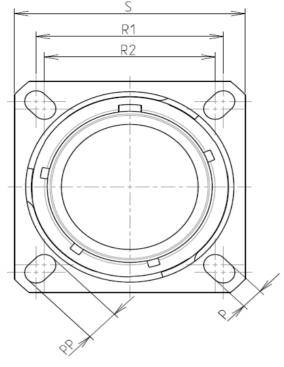



## CHARACTERISTICS

4

ω

BASIC SERIES:

SHELL SIZE : 09

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium				
	-Shell Plating	: Olive drab Cadmium				
	-Insulator	: Thermoplastic				
	-Contacts	: Copper Alloy				
	-Seals & Grommet	: Silicon Elastomer				
2	-Contact Plating	: Gold over copper Alloy 0.8 $\mu$ m minimum				
	-Durability	: 500 Mating cycles				
	-Delivered with Souriau contacts and Accessories					
	-Temperature Range	: -65°C to +175°C				
	-Salt Spray	: 500 hours				
	-Mass	: 10.73 g ± 10%				

8D

Dim	Nominal
Р	3.25±0.2
PP	5.49±0.2
R1	18.26
R2	15.09
S	23.8±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M12x1-6g

п Q	т	D		0				
A Thread A t	S R1 R2 O O O O O O O O O O O O O O O O O O				SHOWN AS EXAMPLE			4
Keving Sh	own as example			2001				
III um Alloy 0.8μm minimum s sories	Connector dimension           Dim         Nominal           P         3.25±0.2           PP         5.49±0.2           R1         18.26           R2         15.09           S         23.8±0.3           V         20.83+0/-1.25           W         2.1/2.5           Z         31.5 Max           VV THREAD         M12x1-6g			due to a use of the the Specifications issue (professional r	e liable for any non-conformit e Products which does not co d by either of the Parties or b ecommendation, technical no Country Jurisd FR 8D009W35SE	mply with by a third party		2
			A 03-10-2016	First Release				
			SS DATE signed By:	Latest modification - by Date:		CUSTOMER DRAWING	MOD N°	_
			TITLE		luminium Receptacl			
0 - 09 W 35 S E	E		SCALE -{		eneral linear Folerances: ±	NPRDS / PROJECT <b>859</b>		1
CONTACT TYPE : SOCKET(500		500 Matings)	OURIAU	communicated without permission		ed or rmission		
	CONTACT LAY	001.05-55	FORMAT A3		DURIAU DRG N° D009W35SE-C		SHEET 1/2	
G F	E	<b>D</b>		C	B	A		
	V	/						

	<u> </u>	۵	<del>ال</del>	m		0	
		Contact Layout				Pa	anel Cutou
4	-×(	$ \begin{array}{c}  & & & & \\  & & & & \\  & & & & \\  & & & &$			~	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Cont positi 1 2 3 4 5 6	+ 0.45 (1.14) + 0.78 (1.98) + 0.78 (1.98) - 0.45 (1.14) + 0.00 (0.00) - 0.90 (2.29) - 0.78 (1.98) - 0.45 (1.14) - 0.45 (1.14) + 0.78 (1.98)			C2 ₩		<i>Δ</i> Τ
	(Applicabi Shell         Arrangement         Numb           size         no.         conta           9         -35         6		]				
ယ						Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lial due to a use of the Pro the Specifications issued by (professional reco	roducts wh by either of
N							Countr FR
						PN: 80	2009V
					A 03-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
					TITLE		minium
<u> </u>					SCALE NA		eral linear erances: ±
					SOURIA	U WWW.SOUF	RIAU.C
					FORMAT A3	SOU 8D	JRIAU 009W
	Н	G	F	E	D	C	

