<u> </u>	دی ا	 111	







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Aluminium			
	-Shell Plating	: Olive drab Cadmium			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	: -65℃ to +175℃			
	-Salt Spray	: 500 hours			

: 14.18 g ± 10%

8D 0

G

11

W

02


В


F

Ν

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

Е



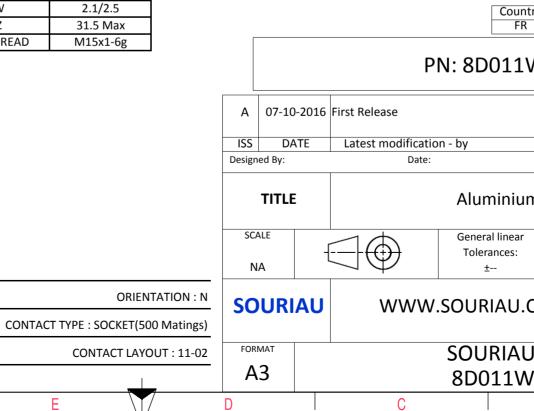

	ω		Þ			
					4	
S EXA	AMPLE				3	
s which er of t indatic untry FR	non-conformit ch does not co che Parties or t on, technical n Jurisc	mply with by a third par	ty		2	
				MOD N°		
		CUSTOME	R DRAWING			
um	n Receptacle 8D series					
ar :			PROJECT			
		_	59	perty of	1	
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U I	J DRG N° SHEET			SHEET		
WO	2BN-C			1/2		
	В		А			

		G	TT I	m	D	0
		Contact Layout				Panel Cutou
4	.v (2.	+Y IB IA +Y +X 95 -Y 095 (2.4imm)			Σ -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Cont posit ID A B Shell Arrangement size no. 11 -2	ion X-axis Y-axis (mm) (mm) + .095 (2.41) + .000 (.00) 095 (2.41) +.000 (.00)	t n		<u>_</u> (Dim
ယ						ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
2						PN: 8D011V
					A 07-10-201 ISS DATE Designed By:	L6 First Release Latest modification - by Date:
<u> </u>					SCALE NA	Aluminium General linear Tolerances: ±
					SOURIAL	
		~		- 1	FORMAT A3	SOURIAU 8D011W
	Н	G	F	I E	D	C

