
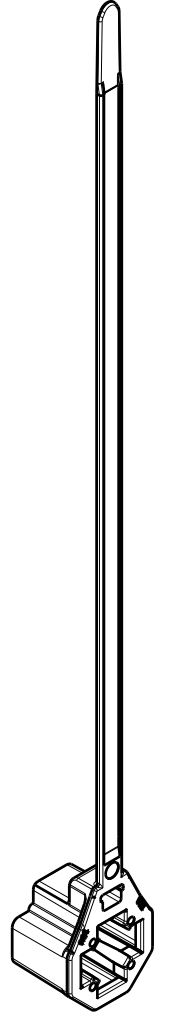
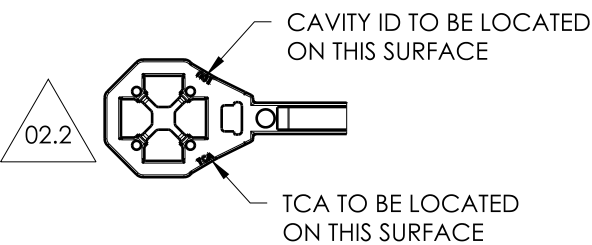


Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
02.2	Design Release	-	SEE ECN# 014026	KVH	10/5/17	EJF	10/6/17

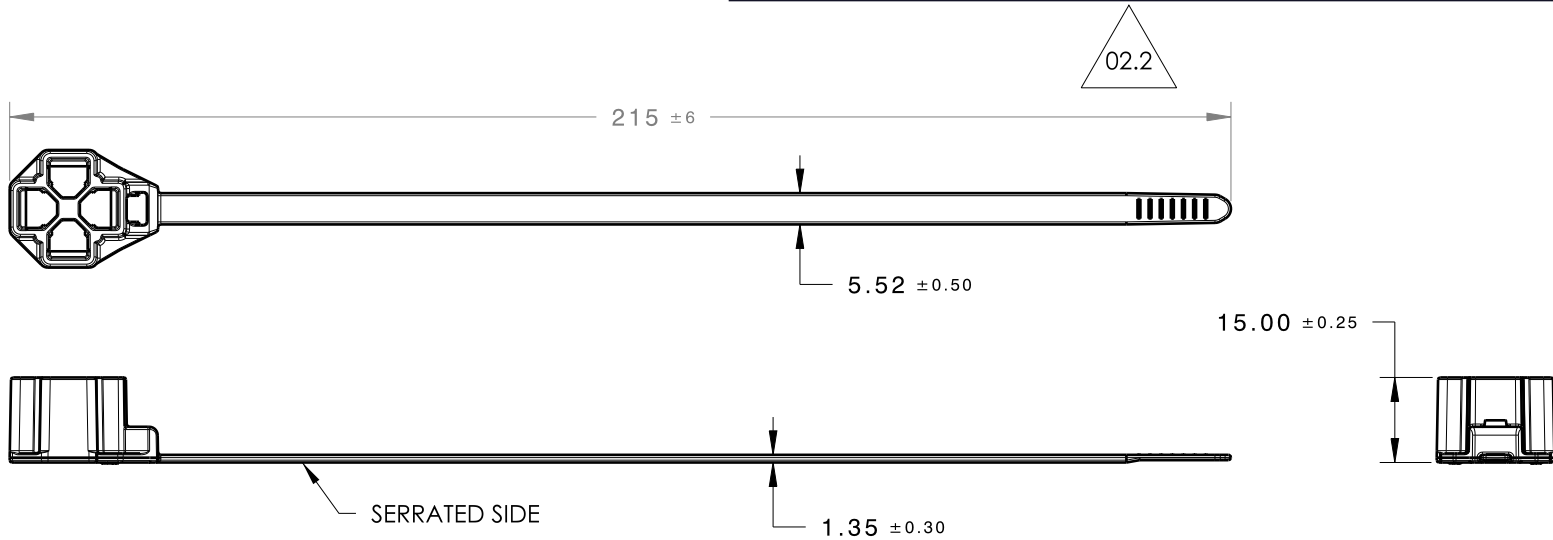

ISOMETRIC VIEW

- REFERENCE:
1. STUD MOUNT PUSH ON FORCE: 45 NEWTONS (10 LBS) MAX ON EACH APPLICABLE STUD SIZE AT DRY AS MOLDED
 2. STUD MOUNT PULL OFF FORCE: 222 NEWTONS (50 LBS) MIN ON EACH APPLICABLE STUD SIZE AT 2.0 TO 2.5% MOISTURE
 3. APPLICABLE STUD SIZE:
 - A. M10 x 1.50
 4. CABLE TIE MIN LOOP TENSILE STRENGTH: 355 NEWTONS (80LBS)
 5. BUNDLE RANGE: 3.5MM TO 50MM
 6. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
 7. MAX ALLOWABLE FLASH OR MISMATCH TO BE 0.5MM

MATERIAL	COLOR
PA66HIRHS	BLACK
PA46	BROWN

Material SEE CHART COLOR: SEE CHART 	Units millimeters Tolerance defined on each dimension	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	EJF	10/7/16	Article/Type-No T80ROSSB10U	Scale	3:4		
			Approved	KVH	10/7/16		Title	M10 STUD MOUNT WITH 80LB CABLE TIE	Project Number	16-0335
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	Production : Phase		Format	AH
						16-0335-001-CSU				Sheet