

ITEM	PART#	DESCRIPTION	QTY	UOM
A	436400400	MicroFit 3.0 Plug SR Pnl Mnt 4Ckt	1	PC
B	430310023	MICROFIT 3.0 M CRP TERM CHN 30AU 18AWG	4	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X18AWG DISC SR-PVC BK UL10002	BLACK
A2	--	1X18AWG DISC SR-PVC BK UL10002	BLACK
A3	--	1X18AWG DISC SR-PVC BK UL10002	BLACK
A4	--	1X18AWG DISC SR-PVC BK UL10002	BLACK

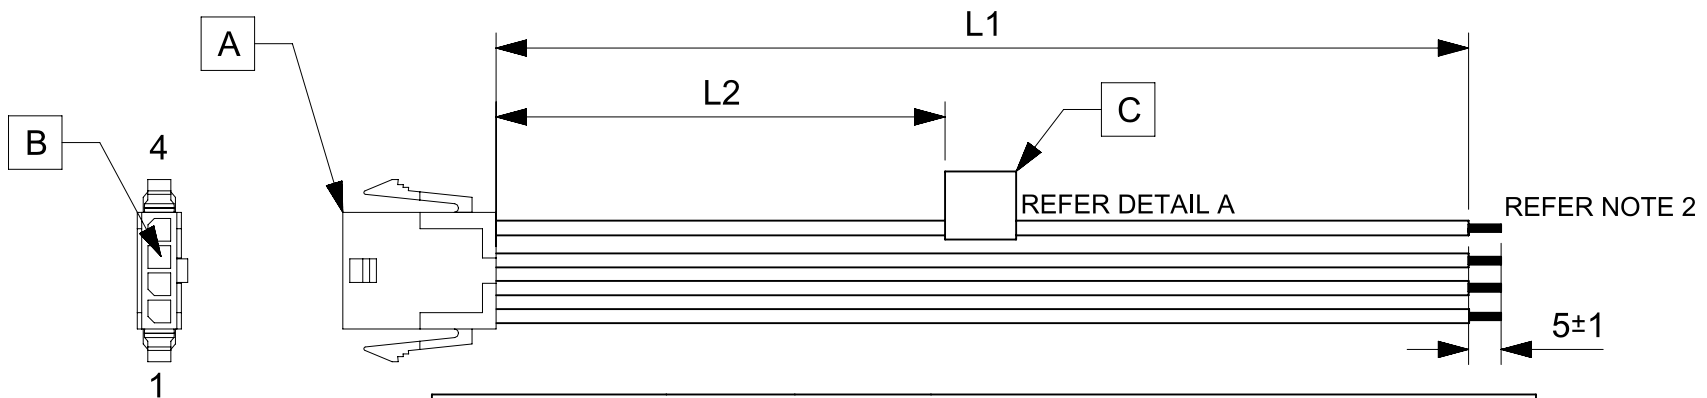


TABLE			
PART NUMBER	L1	L2	TITLE
2147532041	150±8	63 REF	MICROFIT 3.0 SR P-S 4CKT 150 MM Au
2147532042	300±10	138 REF	MICROFIT 3.0 SR P-S 4CKT 300 MM Au
2147532043	600±10	288 REF	MICROFIT 3.0 SR P-S 4CKT 600 MM Au

- NOTES**
1. Connector view shown is from mating side.
 2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.55mm Max.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
 MOLEX
 BATCH WK/YR
 DETAIL A

PRE-RELEASE
 REFERENCE
 USE ONLY

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/02/29	A	INITIAL RELEASE	ARAJU

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC:					
∇ = 0	mm	NTS		EC NO: 637489 DRWN: ARAJU 2020/02/29 CHK'D: RDESAI01 2020/05/14 APPR: RDESAI01 2020/05/14 INITIAL REVISION: DRWN: ARAJU 2020/02/29 APPR: RDESAI01 2020/05/14							
∇ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)										
∇ = 0	ANGULAR TOL ± °										
∇ = 0	4 PLACES	±									
∇ = 0	3 PLACES	±									
∇ = 0	2 PLACES	±									
∇ = 0	1 PLACE	±									
∇ = 0	0 PLACES	±									
∇ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										
∇ = 0	THIRD ANGLE PROJECTION		DRAWING							SERIES	
		A4-SIZE		214753		2147532041		PSD	000	A	
MATERIAL NUMBER		CUSTOMER		SHEET NUMBER							
SEE TABLE		GENERAL MARKET		1 OF 1							

RELEASE STATUS	P1	RELEASE DATE	2020/05/14	03:37:14
----------------	----	--------------	------------	----------