
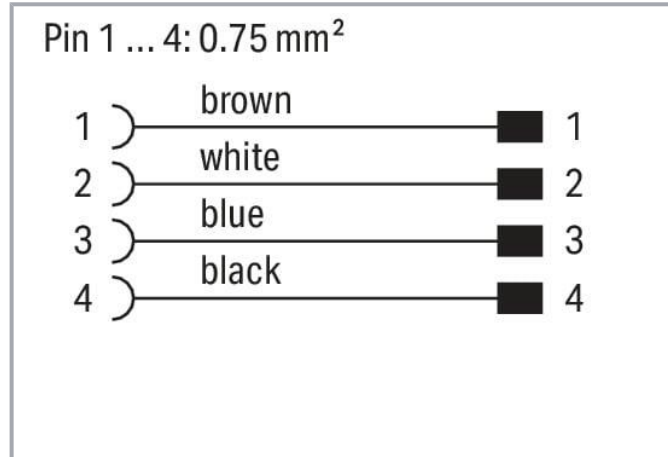
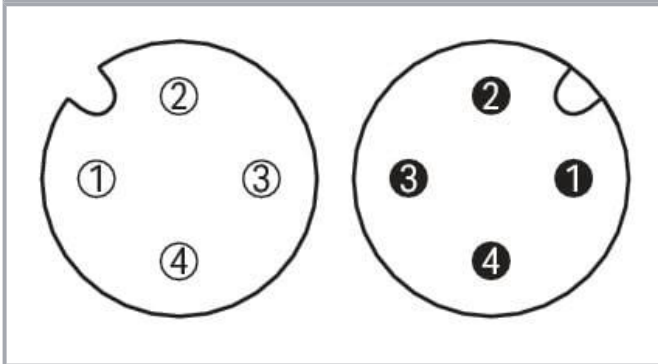


## Data sheet | Item number: 756-3105/040-020

Power cable; M12A socket; straight; M12A plug; straight; 4-pole; Length: 2 m

[www.wago.com/756-3105/040-020](http://www.wago.com/756-3105/040-020)

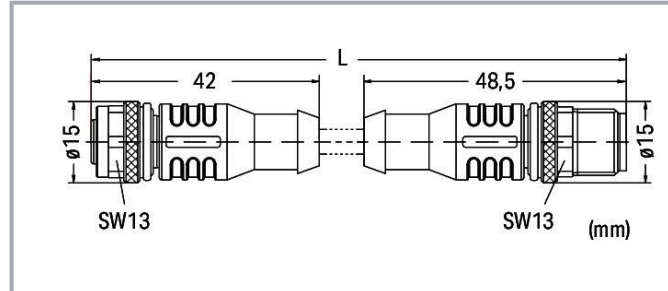

### Item description

#### Short description:

- PUR, halogen-free
- UL / CSA
- Suitable for drag chains
- Silicon- and CFC-free
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Data

### Technical data

Connection type	M12 socket - M12 plug
Pole number	4
Cable connection direction to mating direction	0°
Cable connection direction to mating direction (2)	0°
Connector interface coding (cable/adaptor) 1 1	A-coded
Connector interface coding (cable/adaptor) 2 1	A-coded
Cable length	2 m
PLC manufacturer	WAGO
Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	2.5 kV
Contact resistance	10 mΩ
Insulation resistance	1000 MΩ
Conductor resistance	≤ 26 Ω/km

### Mechanical Data

Bending radius	10 x cable diameter (min.) for flexible application
Bending cycles	4 Mio.
Drag chain capability	yes
Sheathed cable diameter	6 ... 6.4 mm
Type code	Lif9YH-11YH 4x0.75 mm <sup>2</sup>
Conductor configuration	Bare copper wire (40 x 0.15 mm)
Conductor insulation	PP9Y (halogen-free)
Housing material	TPU/TPU, black (~ RAL 9005)
Tightening torque	1 Nm
Weight	135 g

### Environmental requirements

Ambient (operating) temperature (dynamic)	-30 ... +80 °C
Ambient (operating) temperature (static)	-30 ... +80 °C
Protection type	IP67
Pollution degree	3/2 per IEC 60664-1

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

**Commercial data**

eCl@ss 10.0	27-06-18-01
eCl@ss 9.0	27-06-18-01
ETIM 8.0	EC001855
ETIM 7.0	EC003249
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4045454126988
Customs tariff number	85444290900

**Environmental Product Compliance**

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	44360be5-0aae-4f27-b4ce-cb8964622ff8
SCIP notification number (Belgium)	094c9411-6fbb-4293-9a03-f8c8b9163c0f
SCIP notification number (Bulgaria)	0a12e7a3-e580-4fa6-b4dd-d6cbb4318df8
SCIP notification number (Czech Republic)	7ce98a72-8bd9-43eb-8671-9b65af13b92e
SCIP notification number (Denmark)	8060fb24-8097-49e4-840d-e84598e1e92e
SCIP notification number (Finland)	58c918aa-b80e-4d10-8883-083f21e09db9
SCIP notification number (France)	292fcd93-fd80-4424-96ff-5cc993664470
SCIP notification number (Germany)	a7604e65-cc1d-4e2c-82f7-e25b5d7d3fe1
SCIP notification number (Hungary)	afc8c3e3-991b-4b89-8e6e-42ebb8d077cf
SCIP notification number (Italy)	48564245-578f-4749-89ad-971e9d954d2f
SCIP notification number (Netherlands)	5315616c-c6a6-431c-afa4-e3dad701b1ac
SCIP notification number (Poland)	5b8fb0ab-faa3-4cbd-83ce-570264fd17e0
SCIP notification number (Romania)	19300c45-9e62-4fb4-8d5c-12543cc8c5eb
SCIP notification number (Sweden)	94a8f0e2-8fbe-4d38-af81-58458ea3d629

**Approvals / Certificates****General approvals**

Logo	Approval	Additional Approval Text	Certificate name
	UL	UL 2238	E519602

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Underwriters Laboratories Inc.

## Downloads

### Documentation

#### System Description

I/O-SYSTEM – SPEEDWAY, General Product Information	pdf 1.1 MB	Download
--	---------------	----------

## CAD/CAE-Data

### CAE data

WSCAD Universe 756-3105/040-020	URL	Download
WSCAD Universe 756-3105/040-020	URL	Download

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 756-3105/040-020 Power cable; M12A socket; straight; M12A plug; straight; 4-pole; Length: 2 m	URL	Download
---	-----	----------

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.