

DT04-4P-CL06 ✓ ACTIVE

DEUTSCH | DEUTSCH DT


TE Internal #: DT04-4P-CL06

Housing for Male Terminals, Wire-to-Wire, 4 Position, .175 in [4.45 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DT Receptacle Connectors

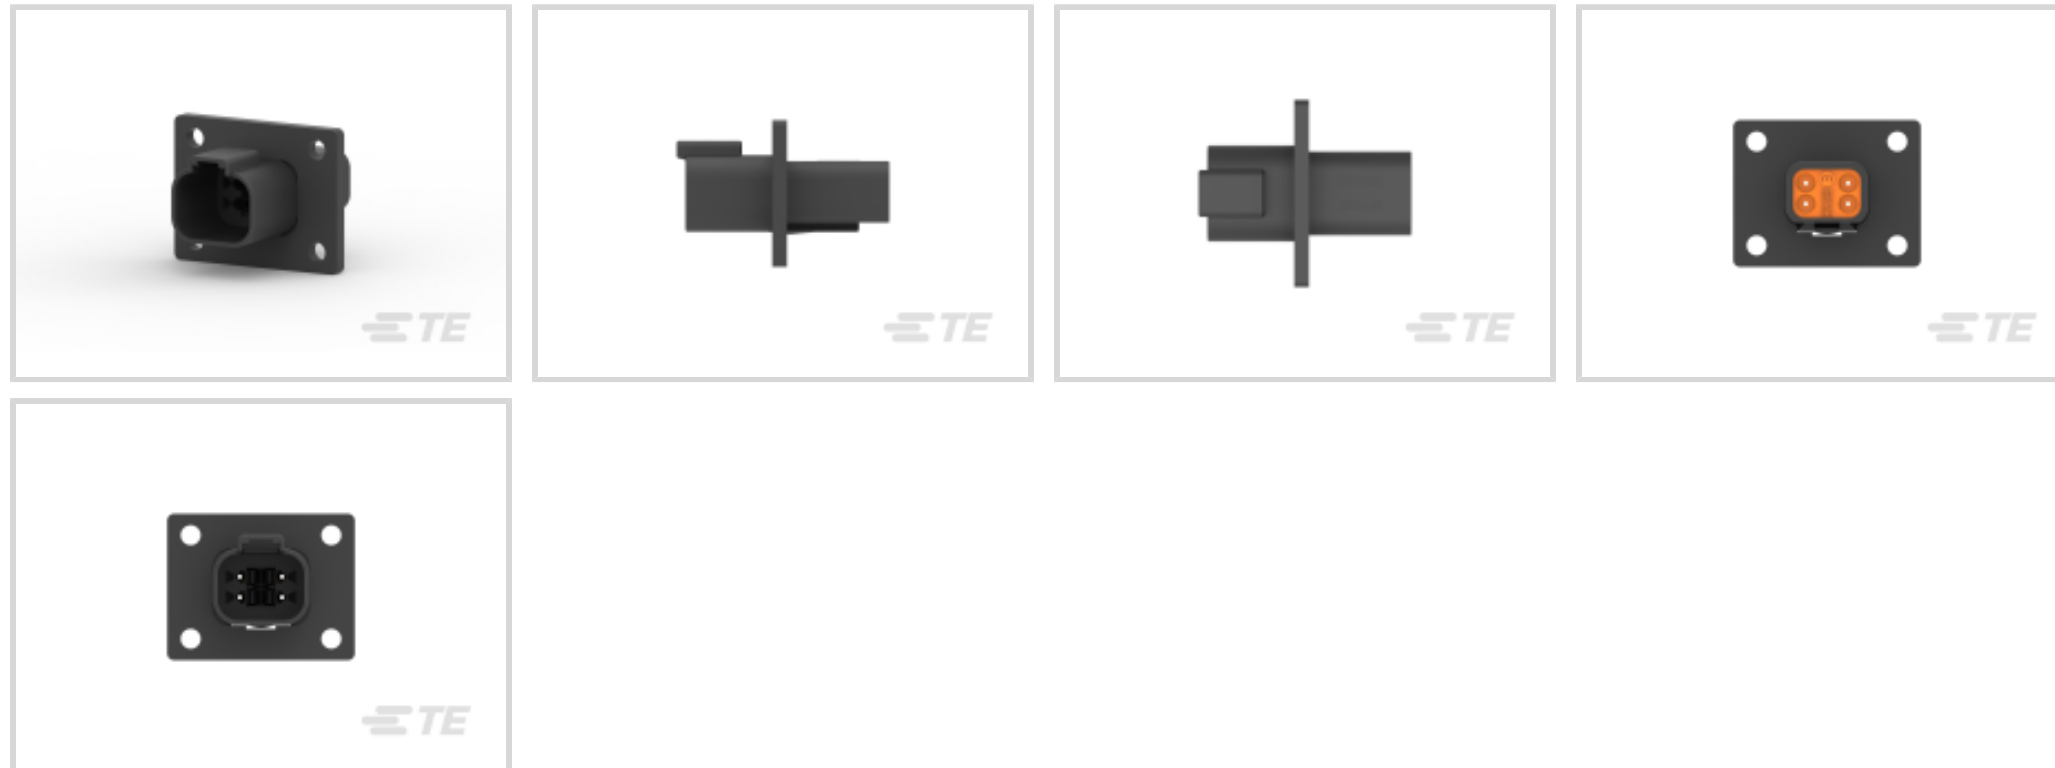

Connector & Housing Type: **Housing for Male Terminals**

Mating Pin Diameter: **1.59 mm [.063 in]**

Connector System: **Wire-to-Wire**

Number of Positions: **4**

Centerline (Pitch): **4.45 mm [.175 in]**

[All DEUTSCH DT Receptacle Connectors \(241\)](#)

Features

Product Type Features

Connector Shape	Rectangular
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Blank Cavity Position	0
Connector Modification	Welded Flange
Connector Seal Code	E Seal
Number of Positions	4
Number of Rows	2



Electrical Characteristics

Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black

Contact Features

Contact Size	Size 16
Contact Type	Pin
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A

Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Panel Mount

Housing Features

Housing Material	PA GF
Centerline (Pitch)	4.45 mm[.175 in]

Dimensions

Connector Height	31.75 mm[1.25 in]
Product Width	40.51 mm[1.595 in]
Product Length	45.92 mm[1.808 in]
Row-to-Row Spacing	9.12 mm[.359 in]
Accepts Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------



Industry Standards

Degree of Protection	IP68, IP6K9K
Agency/Standard	SAE J2030
UL Flammability Rating	12mm Flame Test per Standard UL-94

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # CAT-D487-B128
DEUTSCH DT Backshells



TE Part # CAT-D487-W416
Wedgelocks: DEUTSCH DT




TE Part # CAT-D48-SP729
DEUTSCH Sealing Plugs



TE Part # CAT-J41-DDPC
DEUTSCH DT Plug Connectors



TE Part # DT4P-DC
PROTECT CVR, 4P, REC, GRY, DT



TE Part # CAT-D48-ST273
DEUTSCH Solid Contacts



TE Part # 776364-1
SEALING PLUG, SZ 20 CAVITY



TE Part # DT-RT1
EXT TOOL, FRONT RELEASE



TE Part # DT4P-BT-BK
BOOT, 4P, REC, ST, BLK



TE Part # DT4P-BT-YW
BOOT, 4P, REC, ST, YEL



TE Part # CAT-J67-DSCC16
DEUTSCH Size 16 Crimp Contacts



TE Part # DT4P-L012-GKT
GASKET, 4P, BLK, DT/DTM



TE Part # DT4P-BT
BOOT, 4P, REC, ST, GRY



TE Part # 2300908-1
0460-003-16329, PIN, SOLID, 20-24AWG, AU




TE Part # CAT-D48-SFT273
DEUTSCH Stamped and Formed Contacts


Also in the Series | **DEUTSCH DT**



Automotive Connector Caps & Covers
(107)

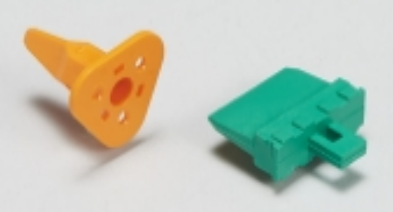

Automotive Connector Locks & Position Assurance(74)



Automotive Housings(618)




Automotive Seals & Cavity Plugs(5)



Insertion & Extraction Tools(3)



Other Automotive Connector Accessories(16)

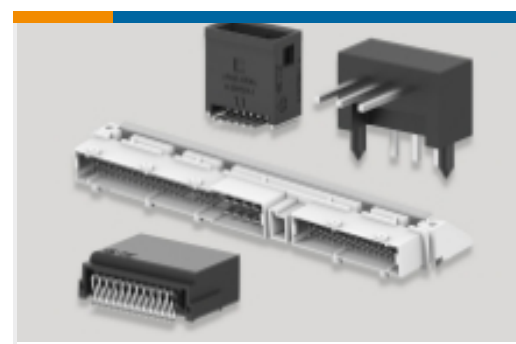

PCB Headers & Receptacles(102)

Customers Also Bought

TE Part #HDP24-24-29PE-L015
DEUTSCH HDP20 HousingsTE Part #DT04-08PA-CL06
REC, 8P, BLK, E, FLANGE, ATE Part #K1146079
Abdeckungs-Set Relais 26-08-54TE Part #HC5739
95MM2 NEGBAT LEAD 1/4" UNC
THREADTE Part #HC5841
70MM2 BATTTERY CLMP ASSMB
NEGATIVETE Part #HC5883
CLAMP BATTERY POSTE Part #HC5901
BATT.POST CLAMP -VE MK.3TE Part #DT04-12PA-930C
REC, 12P, BLK, N, SEALED FLANGE, A

Documents

Product Drawings

REC, 4P, BLK, E, FLANGE

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DT04-4P-CL06_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DT04-4P-CL06_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DT04-4P-CL06_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Datasheets & Catalog Pages

[ICT Terminals and Connectors Catalogue](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English