


TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

\land \Box	L
	l
	┝
	l
	l
	L

ISSUE NUMBER ORIGINAL

(1)



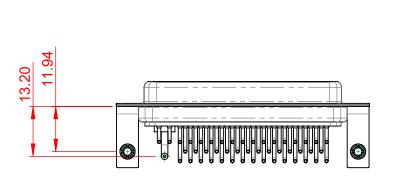

NOTES		
		LEG.
NOTEO.	UV I	IEO.

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

.X ±0.25 .XX ±0.13

.XXX ±0.05

10.70

5.80

11.94


2.54

POWER/CO-AX CONTACT RATING: 10A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE: 5000MΩ min.

1000V AC rms



		SW REFERENCE NO.: 630 COMBO ASSEMBLY					
			COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:			
	EDAC INC TORONTO, ONTARIO CANADA	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
			DRAWING NUMBER: 630-47W	1240-1N3	ISSUE		
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-47W	1240-1N3	1		



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

