
I	۵	н т	m	0





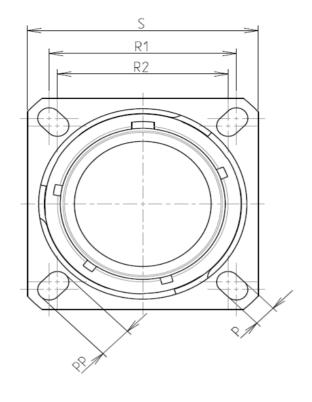

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range -Salt Spray : 48 hours -Mass : 12.01 g ± 10%

8D 0

G

11

F

01

А


F

D

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

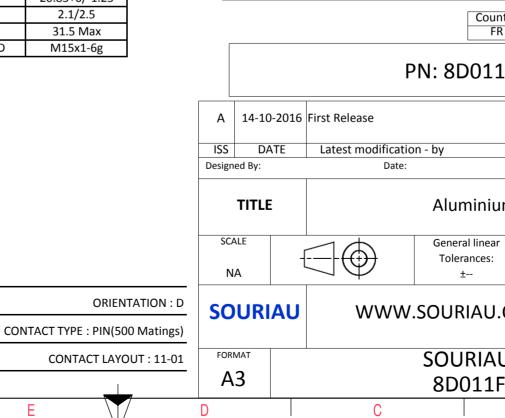

σ		А				
				4		
AS EXAMPLE				3		
any non-conformi which does not co of the Parties or I adation, technical n untry Jurisc	mply with by a third par					
FR	Not Listed			2		
1F01AD						
	CUSTOME	R DRAWING	MOD N°			
um Receptacle 8D series						
ar	NPRDS / PROJECT 859					
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°	1		SHEET			
F01AD-C		A	1/2	J		
2	I					

	Ξ	۵	п	m		0
		Contact Layout				Panel Cutou
4		01			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y	-		<u></u> ₩	ØT.
ယ	A	0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products wh
2						the Specifications issued by either of (professional recommendat Countr FR
						PN: 8D011F
					ISS DATE Designed By: TITLE	Latest modification - by Date: Aluminium
-					SCALE NA SOURIAI	General linear Tolerances: ±
			-		FORMAT A3	SOURIAU 8D011F0
	Н	G	l F	E	D	C

