
I I I I I I I I I I I I I I I I I I I	Ω ا	н п	m	O





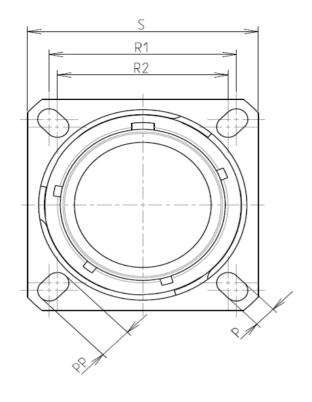

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
N	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	· : 48 hours			

8D 0

G

17

-

F

22

В

F

Ν


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


ORIENTATION : N

CONTACT LAYOUT : 17-22

CONTACT TYPE : SOCKET(500 Matings)

Е



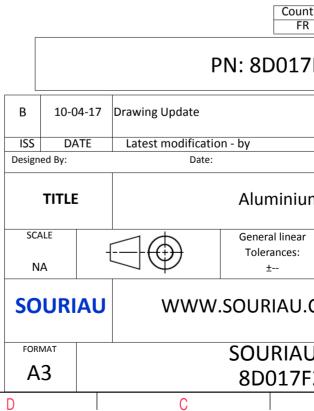

σ		A		
R			4	
AS EXAMPLE			3	
r any non-conform s which does not co er of the Parties or ndation, technical r untry Juris FR 7F22BN	omply with by a third party	ist	2	
		MOD N°	_	
	CUSTOMER DR			
um Receptacle 8D series				
ar :	NPRDS / PROJECT 859			
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N° 7722BN-C		SHEET 1/2		
FZZDIN-C B		A		

ſ	т	۵	г	m	D	0	
4		Contact Layout				REAR MOUNTING	Panel Cut
	Ctc A B C	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57				Max. thickness panel for receptacle: Ty	Ø⊺ pe 0: front m
ω		-6.32 0				ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the P the Specifications issued I (professional rec	roducts v by either ommend
N						PN: 8	Courr FF D017
					ISS Designed B		ıminiu
_					SCALE NA	Gene Tol	eral linear erances: ±
					FORMAT A3		RIAU. JRIAI 0017f
l	Н	G	F	E	D	С	

