

	т	۵	н п	m	0	
ſ		1				





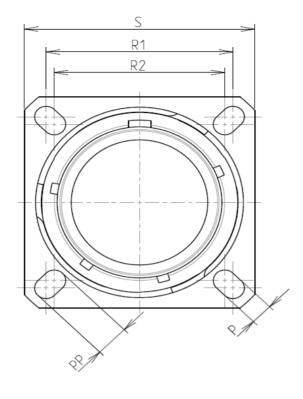

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 19

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite	
-Shell Plating	: Without Plating	
-Insulator	: Thermoplastic	
-Contacts	: Copper Alloy	
-Seals & Grommet	: Silicon Elastomer	
-Contact Plating	: Gold over copper Alloy 0.8µm minimum	
-Durability	: 500 Mating cycles	
-Delivered with Souriau contacts and Accessories		
-Temperature Range	- 65°C to +175°C	

: 2000 hours

: 38.7 g ± 10%

8D 0

G

19

Х

32

S


F

Ν

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	29.36			
R2	26.97			
S	36.5±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	Z 31.5 Max			
VV THREAD	M28x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

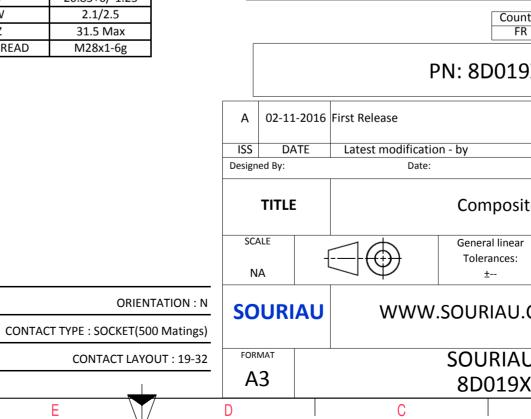

	Ξ			A			
							4
AS EXA	AMPLE						3
s whic er of t ndatio untry FR	non-conformit th does not co he Parties or t on, technical n Jurisd	mply wit by a thiro otice.)	th d party Control L	ist]		2
					<u> </u>	10D N°	-
site	CUSTOMER DRAWING Receptacle 8D series						
ar	NPRDS / PROJECT						
	859						
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N°					SHEET	
X3	2SN-C			Δ		1/2	J
	В			А			

