

CGA6M2X8R1E225K200AD

TDK Item Description : CGA6M2X8R1E225KT***B



Equivalent C3225X8R1E225K for Automotive

Application & Main Feature

Automotive Grade (Conductive Epoxy Application)

Series

CGA6(3225) [EIA CC1210]



Dimensions

L 3.20mm +/-0.45mm
 W 2.50mm +/-0.3mm
 T 2.00mm +/-0.2mm
 B 0.20mm Min.
 G

Temperature Characteristic

X8R (-55 to 150 degC +/-15%)

Rated Voltage

1E (25Vdc)

Capacitance

2.2uF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor

3% Max.


Insulation Resistance

227Mohm Min.


AEC-Q200

Yes


DC Bias Characteristic

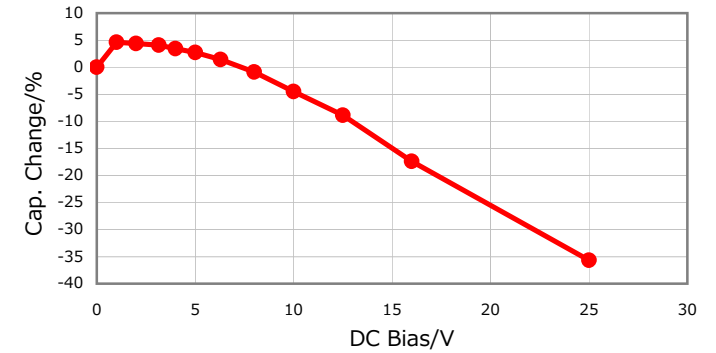


|Z|, ESR vs. Freq. Characteristics

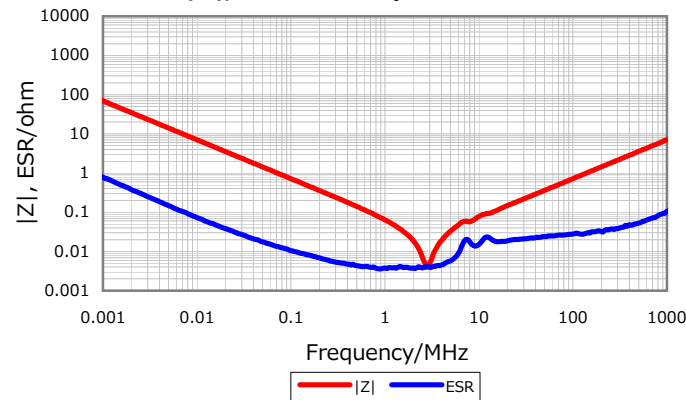


Temperature Characteristics

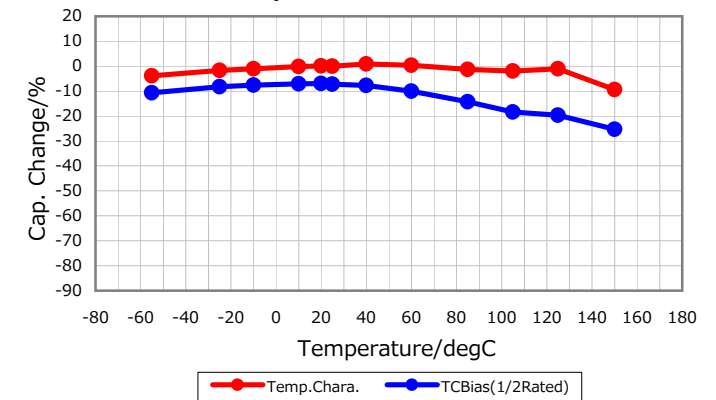

Cap. vs. Freq. Characteristic

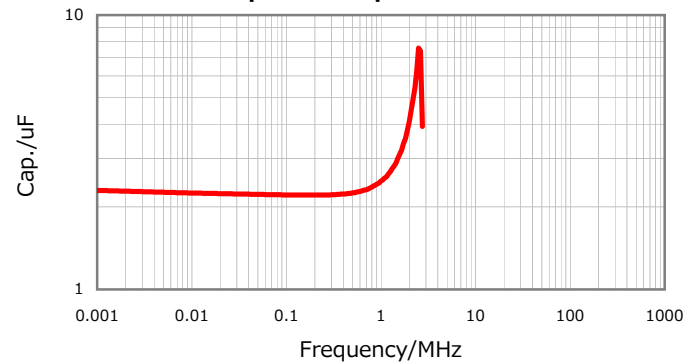

Ripple Temperature Rise Characteristics

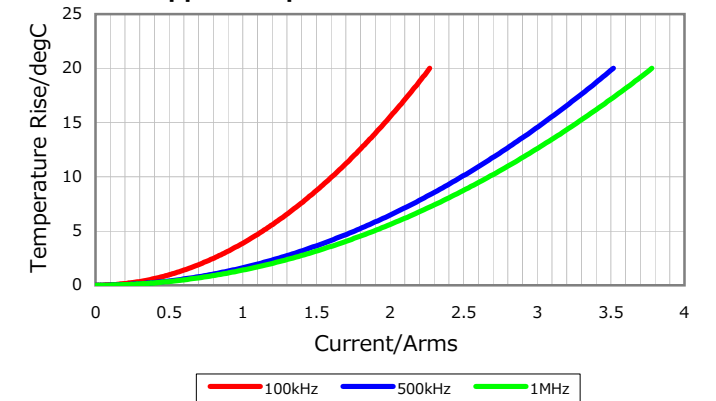

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.

January 4, 2016