

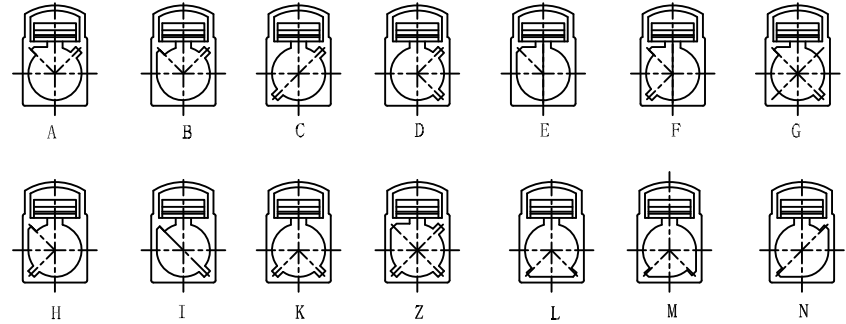

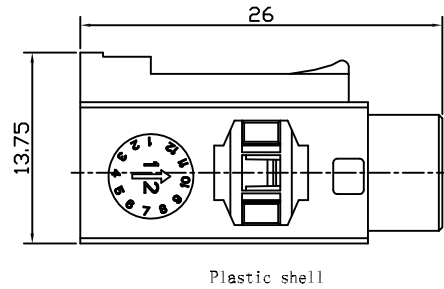

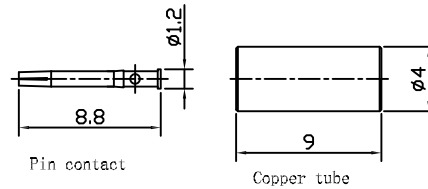


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/6/18	

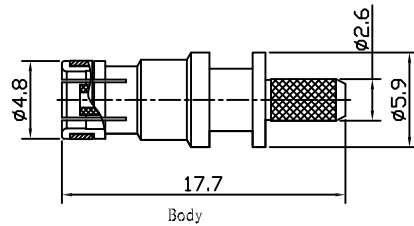

Port Type



Type	Color	For Cable	Item No
A	BLACK	RG174/316	RF55-34A-T-02-50-G-SH
B	WHITE		RF55-34B-T-02-50-G-SH
C	BLUE		RF55-34C-T-02-50-G-SH
D	BORDEAUX VIOLET		RF55-34D-T-02-50-G-SH
E	GREEN		RF55-34E-T-02-50-G-SH
F	BROWN		RF55-34F-T-02-50-G-SH
G	GREY		RF55-34G-T-02-50-G-SH
H	VIOLET		RF55-34H-T-02-50-G-SH
I	BEIGE		RF55-34I-T-02-50-G-SH
K	CURRY		RF55-34K-T-02-50-G-SH
Z	WATER BLUE		RF55-34Z-T-02-50-G-SH
L	CARMINE RED		RF55-34L-T-02-50-G-SH
M	PASTEL ORANGE		RF55-34M-T-02-50-G-SH
N	PASTEL GREEN		RF55-34N-T-02-50-G-SH

DESCRIPTION	MATERIAL	FINISH
PLASTIC SHELL	PA66+30%GF	
SNAP RING	PA66+30%GF	
SNAP RING	BERYLLIUM COPPER	
COPPER TUBE	BRASS	NICKEL
INSULATOR	PTFE	
PIN CONTACT	BERYLLIUM COPPER	GOLD
BODY	BRASS	GOLD
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:
 Electrical:
 Frequency range: DC~4 GHz
 Nominal Impedance: 50 ohms
 VSWR: < 1.3
 Withstanding voltage: 335 V
 Insulator Resistance: 1000 MΩ
 Contact Resistance: 6 Milliohms max. (Center Contact)
 1 Milliohms max. (Outer Contact)

Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± 0.25	Ø.XX	± 0.13
.XX	± 0.15		
.XXX	+ 0.05		
APPROVALS		DATE	
DRAWN	AY	6/6/18	
CHECKED	MY	6/6/18	
APPROVED			

ADAM TECH
 INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE FAKRA JACK SMB TYPE STRAIGHT FOR RG174 / RG316, GOLD PLATED BODY			
SIZE	PART NO.	REV.	
X	RF55-34X-T-02-50-G-SH	-	
REF:	S00134C	SCALE:	NTS
		SHEET 1 OF 1	

6

5

4

3

2

1

6

5

4

3

2

1