

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



| ISSUE NUMBER | |
|--------------|-----|
| ORIGINAL | (1) |

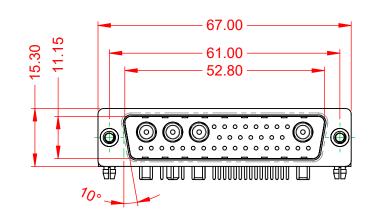




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING: 30A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.


.X ±0.25 .XX ±0.13 .XXX ±0.05

DIELECTRIC WITHSTANDING VOLTAGE:


OPERATING TEMPERATURE:

-55°C ~ 125°C

1000V AC rms



| | | SW REFERENCE NO.: 629 COMBO ASSEMBLY | | | |
|-----------------|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|------------------|-------|
| | | | DRAWN: C.B | DATE: JAN. 01/20 | 19 |
| | | | CHECKED: | DATE: | |
| D | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 2 |
| S Y. YOUR | YOUR CONNECTION TO QUALITY & SERVICE | SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 629-36W4250-313 | | ISSUE |
| | | | PART NUMBER: 629-36W4 | 4250-3T3 | 1 |



COMPLIANT

| THIS SERIES FULLY CONFORMS TO |
|--------------------------------|
| THE EUROPEAN UNION DIRECTIVES |
| 2011/65/EU FOR RoHS COMPLIANCY |

