

REV. 1

DCO 141326


TOL ± .010 UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE	210 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	5.4 VDC
MUST RELEASE	3.2 VDC MAX, 0.6 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.  
BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

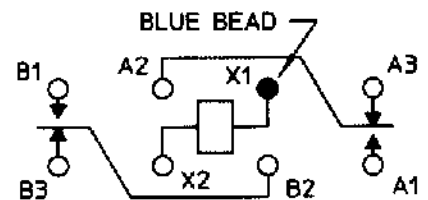

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE  
50,000 OPERATIONS

DR. R.B. 9/10/97 CK. 9/20/99 Gq H

COMMUNICATIONS  
INSTRUMENTS, INC.

CUST. QPL  
CUST. NO. M39016/13-065L REV.

'3SBC' RELAY

3SBC1511A2