


# RI-27GP Series Dry Reed Switch

13.5 mm, 1 Form A, 10 Watt

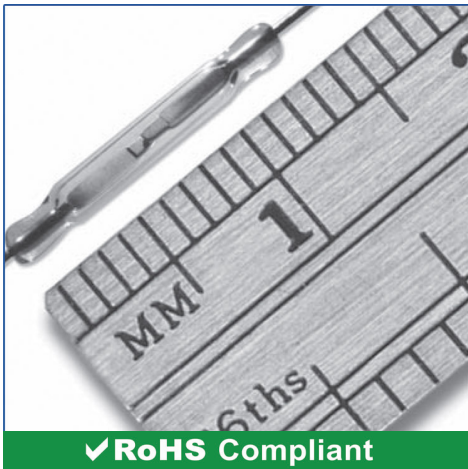

✓ RoHS Compliant

## RI-27GP Series


Pico dry-reed switch hermetically sealed in a gas-filled glass envelope. Single-pole, single-throw (SPST) type, having normally open contacts, and containing two magnetically actuated reeds.

The switch is of the double-ended type and may be actuated by an electromagnet, a permanent magnet or a combination of both. The device is intended for use in relays, sensors, pulse counters or similar devices.

## RI-27GP Series Features

- Ideal for ATE switching
- Contact layers: gold, sputtered ruthenium
- Superior glass-to-metal seal and blade alignment
- Excellent life expectancy and reliability
- UL File #E125629

## Dimensions for RI-27GP Series

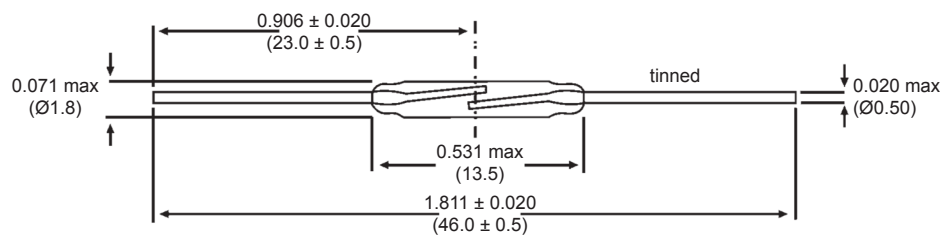

All Dimension in inches (mm) nominal

## General data for all models RI-27GP

### AT-Customization / Performed Leads

Besides the standard models, customized products can also be supplied offering the following options:

- Operate and release ranges to customer specification
- Cropped and/or performed leads

### Life expectancy and reliability

The life expectancy data given below are valid for a coil energized at 1.25 times the published maximum operate value for each type in the RI-27GP series.

### No load conditions (operating frequency: 100Hz)

Life expectancy: min.  $10^9$  operations with a failure rate of less than  $2 \times 10^{-10}$  with a confidence level of 90%.

End of life criteria:

- Contact resistance  $> 1\Omega$  after 2 ms
- Release time  $> 2$  ms (latching or contact sticking).

### Loaded conditions (resistive load: 5 V; 100 mA; operating frequency: 125 Hz)

#### RI-27GP-1015

Life expectancy: min.  $2 \times 10^7$  operations with a failure rate

of less than  $10^{-8}$  with a confidence level of 90%.

End of life criteria:

- Contact resistance  $> 1\Omega$  after 2.5 ms
- Release time  $> 1$  ms (latching or contact sticking).

#### RI-27GP-1520; RI-27GP-2025

Life expectancy: min.  $5 \times 10^7$  operations with a failure rate of less than  $0.5 \times 10^{-8}$  with a confidence level of 90%.

End of life criteria:

- Contact resistance  $> 1\Omega$  after 2.5 ms
- Release time  $> 1$  ms (latching or contact sticking).

### Mechanical Data

Contact arrangement is normally open; lead finish is tinned; net mass is approximately 100mg; and can be mounted in any position.

### Shock

The switches are tested in accordance with "IEC 68-2-27", test Ea (peak acceleration 150 G, half sinewave; duration 11 ms). Such a shock will not cause an open switch (no magnetic field present) to close, nor a switch kept closed by an 80 AT coil to open.

## Technical Specifications

Parameters	Test Conditions	Units	RI-27GP-XXXX		
<b>Operating Characteristics</b>					
Operate Range		AT*	10-15	15-20	20-25
Release Range		AT*	4-14	5-18	7-20
Operate Time - including Bounce (typ.)		ms	0.25	0.25	0.25
Bounce Time (typ.)		ms	0.05	0.05	0.05
Release Time (max)		µs	30	30	30
Resonant Frequency (typ.)		Hz	6700	6700	6700
<b>Electrical Characteristics</b>					
Switched Power (max)		W	10	10	10
Switched Voltage DC (max)		V	180	200	200
Switched Voltage AC, RMS value (max)		V	130	140	140
Switched Current DC (max)		mA	500	500	500
Switched Current AC, RMS value (max)		mA	500	500	500
Carry Current DC (max)		A	1.5	1.75	1.75
Breakdown Voltage (min)		V	180	240	280
Contact Resistance (initial max.)		mΩ	115	115	115
Contact Resistance (initial typ.)		mΩ	90	90	90
Contact Capacitance (max)	without test coil	pF	0.3	0.3	0.25
Insulation Resistance (min)	RH ≤ 45%	MΩ	10 <sup>6</sup>	10 <sup>6</sup>	10 <sup>6</sup>

\*AT values are based on full length, measured using Philips Standard Coil (PSC).

### Vibration

The switches are tested in accordance with “IEC 68-2-6”, test Fc (acceleration 10G; below cross-over-frequency 57 to 62 Hz; amplitude 0.75 mm; frequency range 10 to 2000 Hz; duration 90 minutes.) Such a vibration will not cause an open switch ( no magnetic field present) to close, nor a switch kept closed by an 80 AT coil to open.

### Mechanical Strength

The robustness of the terminations is tested in accordance with “IEC 68-2-21”, test Ua1 (load 10 N).

### Operating and Storage Temperature

Operating ambient temperature; min: -55°C; max: +125°C. Storage temperature; min: -55°; max: +125°C. Note: Temperature excursions up to 150°C may be permissible. For more information contact your nearest Comus Group sales office.

### Soldering

The switch can withstand soldering heat in accordance with “IEC 68-2-20”, test Tb, method 1B: solder bath at 350 ± 10°C for 3.5 ± 0.5 s. Solderability is tested in accordance with “IEC 68-2-20” test Ta, method 3: solder globule temperature 235°C; ageing 1b: 4 hours steam.

### Welding

The leads can be welded.

### Mounting

The leads should not be bent closer than 1 mm to the glass-to-metal seals. Stress on the seals should be avoided. Care must be taken to prevent stray magnetic fields from influencing the operating and measuring conditions.

### Ordering Information

#### RI-27GP - XXXX

	AT Ranges
	1015
	1520
<b>Series</b>	2025

\* As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.