

NOTES:

- 1. MATERIAL: SEE TABLE
- 2. FINISHES: SEE TABLE
- 3. ELECTRICAL SPECIFICATIONS
VOLTAGE RATING: 30VAC
CURRENT RATING: 1.5 AMPS

CABLE P/N MATRIX


E66A06017MXXX

CONNECTOR TYPE
(DBL ENDED RJ45)

PLUG TO RJ45 PLUG

CABLE TYPE
(22 AWG 2PAIR PLTC)

FINISHED LENGTH
M001 = 0.1M
M010 = 1.0M
M100 = 10.0M

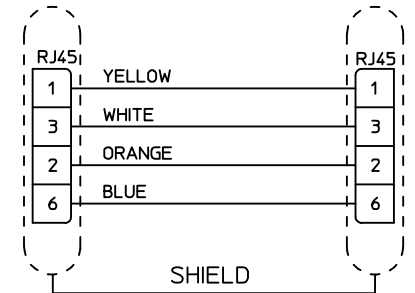

WIRING DIAGRAM

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
4	1	WRAP LABEL	VINYL	BLACK/YELLOW
3	1	RJ45 BOOT	PVC	BLACK
2	1	RJ45 PLUG	PC SHELL, BRASS CONT	CLEAR, GOLD PLT
1	1	CABLE, PROFINET, 2PR, 22 AWG, SHLD, PLTC	TPE JACKET	GREEN

RELEASED
EC NO: IPG2016-0528
DRAWN BY: DRWNRSTONE 2015/10/08
CHKD BY: KJOZWIK
APPR: BWOODMAN 2015/10/12

QUALITY SYMBOLS
▽=0
▽=0

	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm	INCH
4 PLACES	± .005	± .0004
3 PLACES	± .002	± .0001
2 PLACES	± .001	± .0001
1 PLACE	± 0.0005	± .0001
0 PLACE	± .0001	± .0001

ANGULAR ± 1°
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	
IN/MM	DATE
DRAWN BY: RSTONE	2015/10/08
CHECKED BY: KJOZWIK	DATE
APPROVED BY: BWOODMAN	2015/10/12
MATERIAL NO.	-

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
1:1	INCH	THIRD ANGLE PROJECTION
TITLE RJ45 CABLE ASSY RJ45 PLUG TO RJ45 PLUG 22 AWG, 2 PAIR PLTC		
DOCUMENT NO. SD-120108-093		
SHEET NO. 1 OF 1		