

**Ratings**

Voltage: 300 V  
 Temperature: -25 ~ 80 °C  
 Flammability: VW-1

**Conductor**

Conductor count: 2  
 Gauge: 26 AWG 0.14 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\varnothing 0.16 \times 7$   
 Resistance at 20 °C: 150  $\Omega$  /km max



**Outer jacket**


Material: PVC  
 Color: red, black  
 Diameter:  $2.7 \pm 0.20$  mm  
 Nominal thickness: 0.43 mm  
 Resistance at 20 °C: 10 M $\Omega$  /km min

**Wire marking:** E339579 UL AWM STYLE 2468 26 AWG 80°C  
 300V VW-1 --- cUL AWM I A 80°C 300V FT1 TENSILITY

**Tests**

Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113  $\pm 2$  °C for 7 days:  
 Minimum tensile strength 70 % original  
 Minimum elongation 65 % original  
 Heat shock: 121  $\pm 1$  °C /1 hour, no observed degradation  
 Deformation: 121  $\pm 1$  °C /1 hour,  $\leq 50$  %  
 Cold bend: -10  $\pm 2$  °C /1 hour, no observed cracking

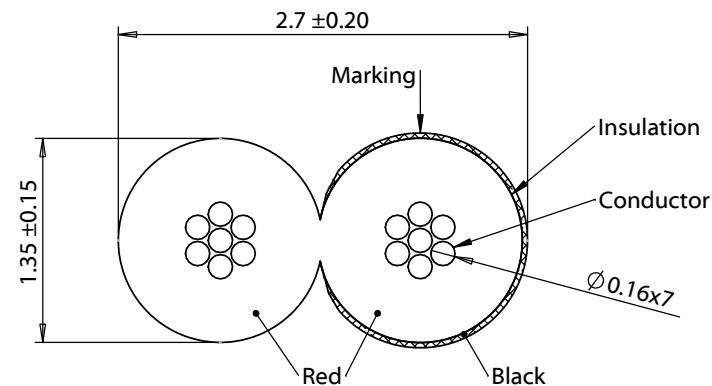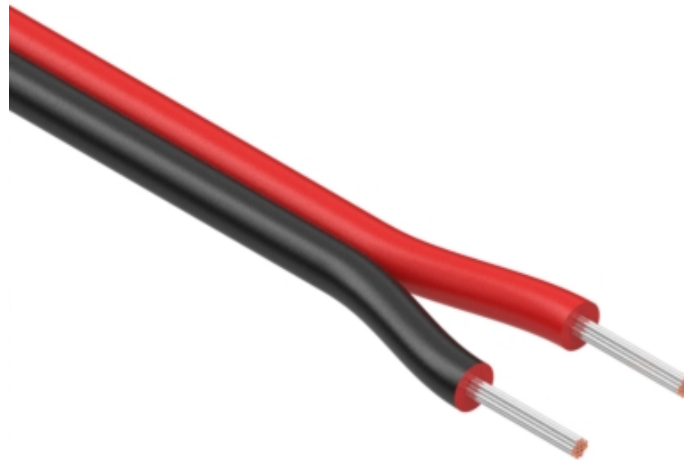

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118          fax 1.541.323.4202 web tensility.com</p>
A	7/22/2014	Initial release	Verified:	RoHS and REACH compliant	
A1	10/14/2014	Updated jacket construction	Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm	Function test: no open, no short circuit, no intermittent	
A2	9/8/2015	Updated jacket tolerance		Description:	
A3	9/7/2018	Increased operating temperature range		Wire, 2C TS, 26 AWG, UL2468, 300V, 80°C, 2.7 mm, VW-1, PVC, red and black	Scale: 12:1 
					Sheet 1 of 1

5

4

3

2

1