
| т | ۵ | н т | m | 0 |
|---|---|------------|---|---|
| | | | | |





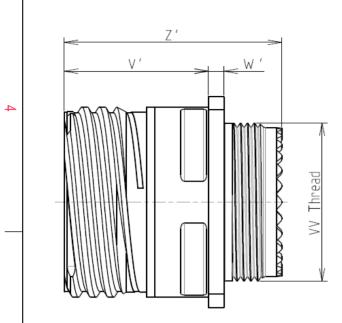

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

PLATING : J =

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +175°C -Temperature Range

: 2000 hours

Olive drab Cadmium

8D 0

G

11

J

22

В


J

F

| Connector dimension | | | |
|---------------------|-------------|--|--|
| Dim | Nominal | | |
| Р | 3.25±0.2 | | |
| PP | 4.93±0.2 | | |
| R1 | 20.62 | | |
| R2 | 18.26 | | |
| S | 26.2±0.3 | | |
| V | 19.5+1.4/-0 | | |
| W' | 2.1/3.65 | | |
| Z' | 32 Max | | |
| VV THREAD | M15x1-6g | | |

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

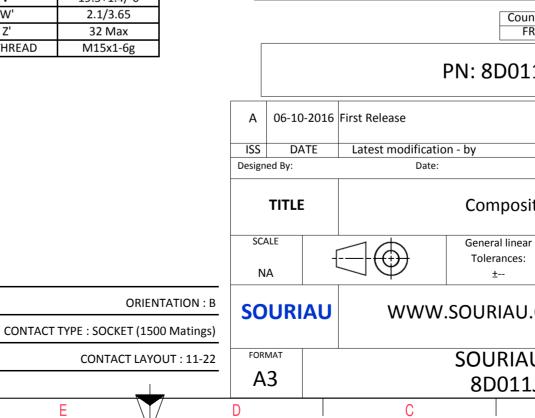

| | Φ | | A | | |
|--|---|--|--|--------|-----|
| | | | | | 4 |
| AS EXA | AMPLE | | | | 3 |
| whice er of t idatio untry R | non-conformit th does not co he Parties or to n, technical n Jurisd | mply with by a third part | | | 2 |
| | | | | MOD N° | |
| ar J.CC | Receptacl | e 8D serio NPRDS / 8 This doc it mus | PROJECT 59 soument is the prop SOURIAU t not be reproduc | ed or | . 1 |
| U DRG N° | | communi | communicated without permission SHEET | | |
| | 2JB-C | | | 1/2 | |
| | В | | А | | - |
| | | | | | |

| , | | | | | | | | |
|---|------------------|---|---|---|---------------------|-------|---|---|
| 4 | (| Contact Layout 22* | | | | SQUAR | E FLANGE RECEPTACLE (TY REAR MOUNTING R1 | Panel Cu |
| | Ctc | 4#22D 11-22 X Y | | | | | | |
| ى | A B C D | 1.905 1.905 1.905 -1.905 -1.905 -1.905 -1.905 1.905 | | | | | | Dim ØA ØAA R1 ØT |
| | F | | | | | | SOURIAU shall no due to a use of the Specifications is (profession | the Products |
| N | | | | | | | | Cour F N: 8D01 |
| | | | | | A ISS Designe | | | |
| | | | | | SCA N/ | |]@ | Composi General linear Tolerances: ± |
| | | | | | FORM | | WWW.S | SOURIA |
| l | Н | G | F | E | D | | С | 8D011 |
| | | | | | ¥ | | | |

Т

ш

т

G

0

